

METRIC


MIL-DTL-24728/10  
W/AMENDMENT 2  
8 January 2015  
SUPERSEDING  
MIL-DTL-24728/10  
W/AMENDMENT 1  
19 September 2012

DETAIL SPECIFICATION SHEET

INTERCONNECTION BOX, CABLE ROUTING, FIBER OPTIC, SPRAYTIGHT, 712 X 1017 mm

This specification is approved for use by all Departments  
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall  
consist of this specification sheet and MIL-I-24728.

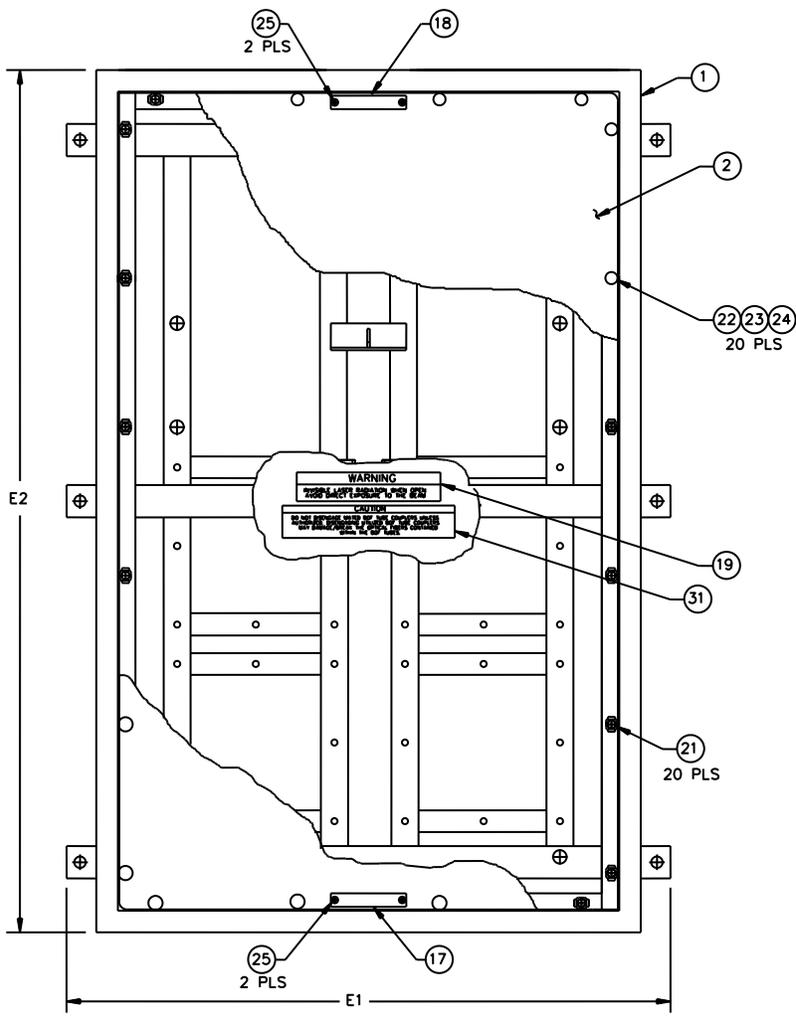

NOTE: For dimension, see table I.


FIGURE 1. Enclosure assembly, cover shown partially removed.

AMSC N/A

FSC 6099



MIL-DTL-24728/10  
W/AMENDMENT 2

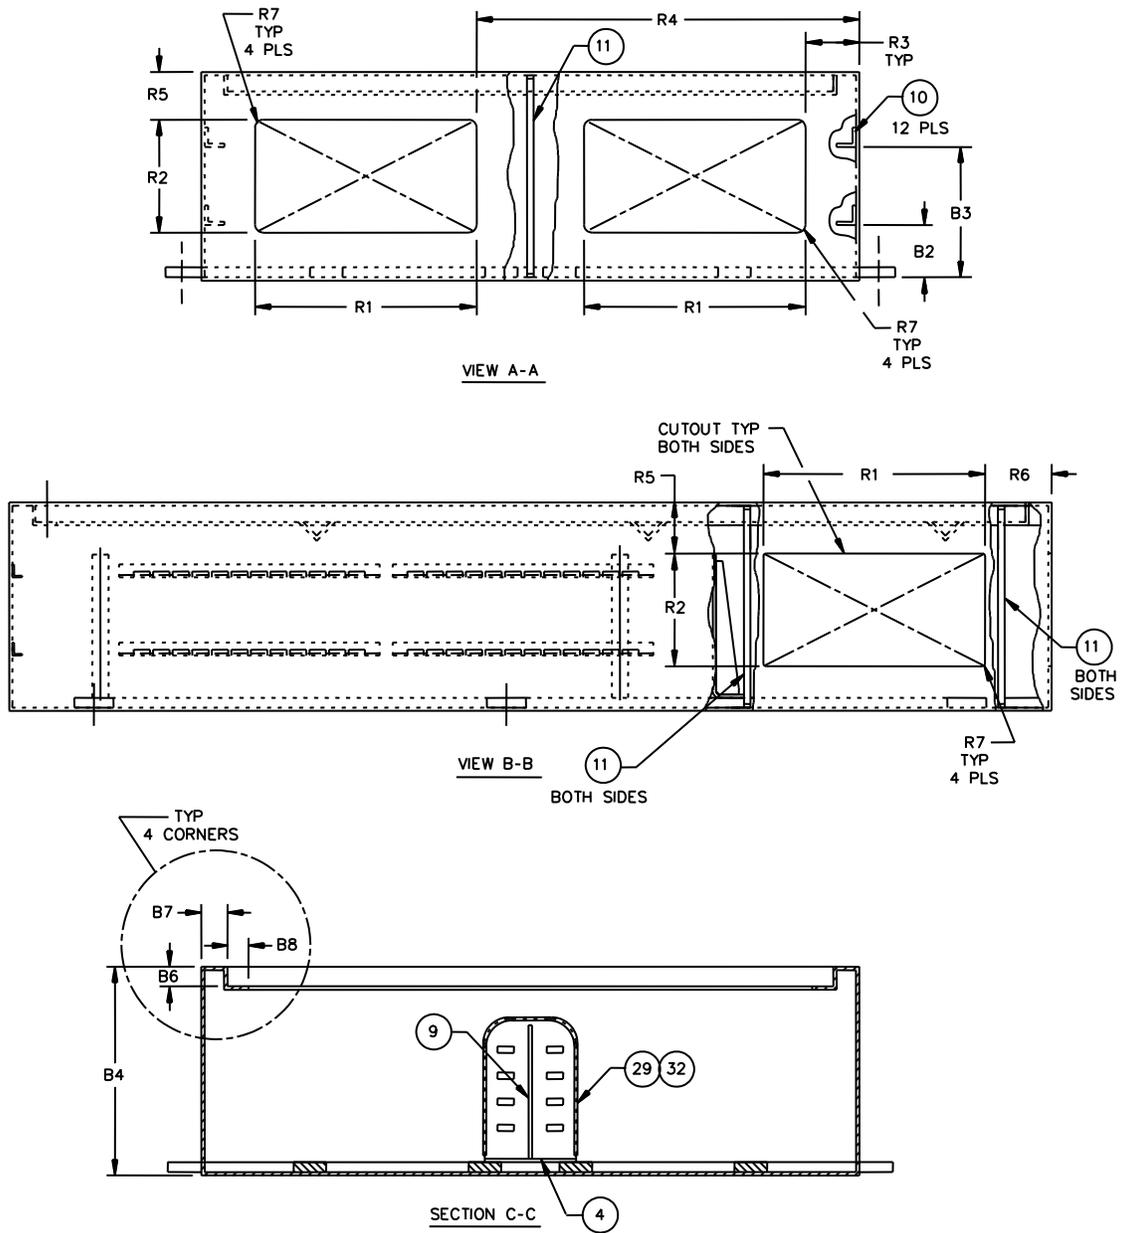

NOTES:

1. See figure 2 for location of sections and views.
2. For dimensions, see table I.
3. Cutouts can be used for optional multiple cable transit (MCT) devices.

FIGURE 1. Enclosure assembly, continued (side and end views with dimensions of cutouts).


MIL-DTL-24728/10  
W/AMENDMENT 2

TABLE I. Enclosure assembly dimensions.

Designator	Descriptions	Dimensions <sup>1/</sup>			
		mm		inches	
		nom	tol.	nom	tol.
B2	Channel bottom to lower tie wrap rail	50.8	±2.5	2.00	±.10
B3	Channel bottom to upper tie wrap rail	127.0	±2.5	5.00	±.10
B4	Box depth	204	max	8.0	max
B6	Top recess for cover	19.1	±2.5	.75	±.10
B7	Top lip	25.4	±2.5	1.00	±.10
B8	Lip to opening	20.6	±2.5	.81	±.10
E1	Width over mounting tabs	712	max	28.0	max
E2	Box height	1017	max	40.0	max
R1	MCT cutout width	215.9	±0.5	8.50	±.02
R2	MCT cutout height	110.0	±0.5	4.33	±.02
R3	Box side to MCT cutout	41.1	±0.5	1.62	±.02
R4	Box side to MCT cutout	384.3	±2.5	15.13	±.10
R5	Box top to MCT cutout	50.8	±2.5	2.00	±.10
R6	Box end to MCT cutout	64.8	±2.5	2.55	±.10
R7	Box MCT cutout inside radius	3.30	±0.38	.130	±.015

<sup>1/</sup> Inch equivalents are given for information only.

MIL-DTL-24728/10  
W/AMENDMENT 2

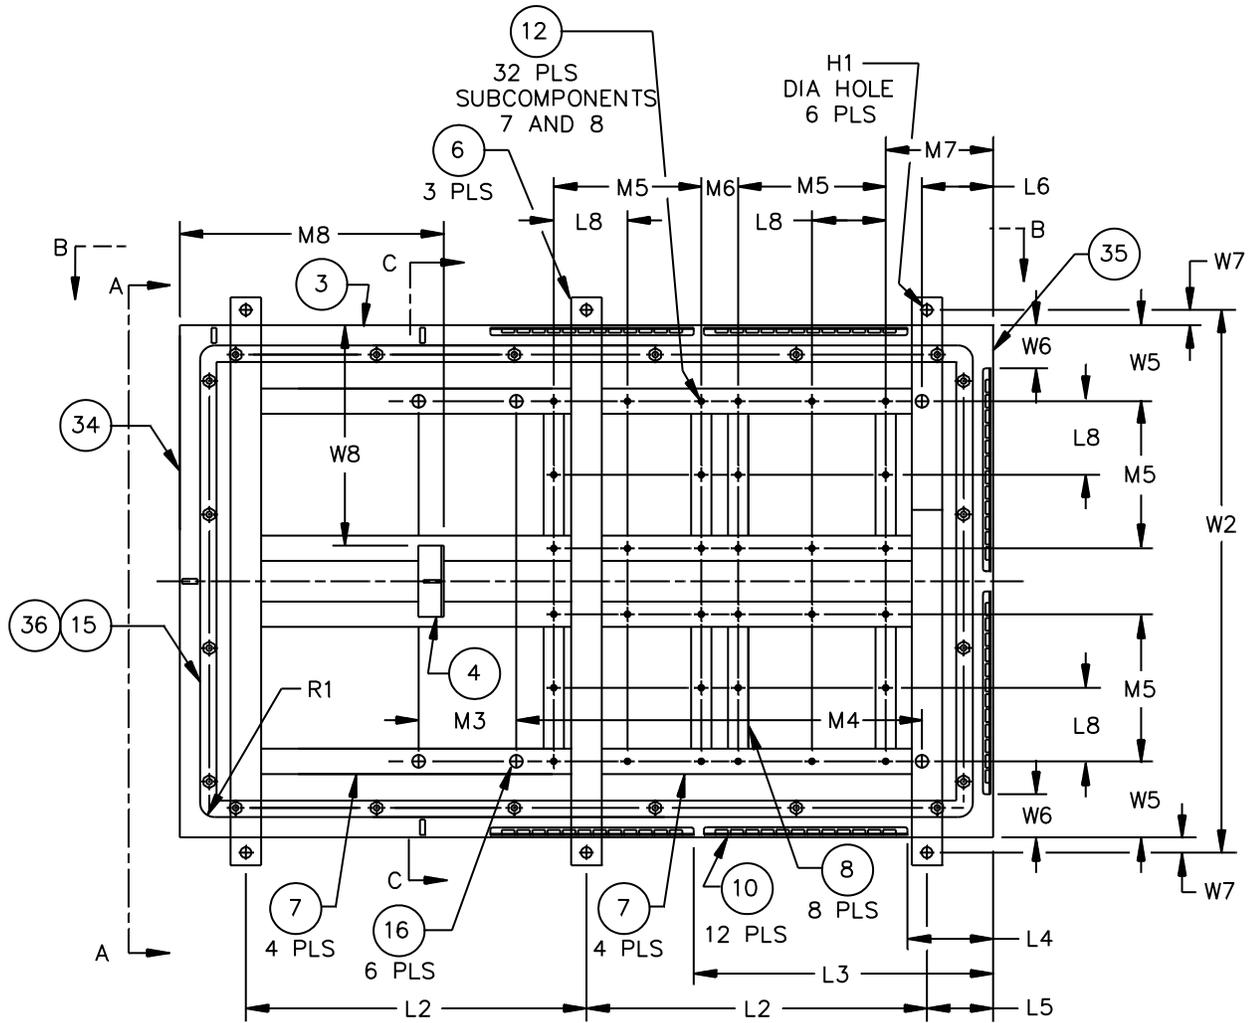

NOTES:

1. See figure 1 for sections and views.
2. For dimensions, see table II.
3. Mounting holes (H1) shall accommodate 1/2 -13 UNC bolts.

FIGURE 2. Enclosure assembly (without cover).

MIL-DTL-24728/10  
W/AMENDMENT 2

TABLE II. Enclosure assembly (without cover), dimensions.

Designator	Descriptions	Dimensions <sup>1/</sup>			
		mm		inches	
		nom	tol	nom	tol
H1	Box mounting hole diameter	13.49	±0.13	.531	±.005
L2	Box Mounting hole CL to mounting hole CL	425.5	±2.5	16.75	±.10
L3	Tie wrap rail location	373.6	±2.5	14.71	±.10
L4	Tie wrap rail location	106.9	±2.5	4.21	±.10
L5	Box end to box mounting hole CL	82.6	±2.5	3.25	±.10
L6	Box end to routing post hole location CL	87.0	±2.5	3.40	±.10
L8	Component mounting hole CL to mounting hole CL	92.2	±1.0	3.63	±.04
M3	Routing post hole CL location to hole CL location	122.2	±2.5	4.81	±.10
M4	Routing post hole CL location to hole CL location	506.5	±2.5	19.94	±.10
M5	Component mounting hole CL to mounting hole CL	184.2	±1.0	7.25	±.04
M6	Component mounting hole CL to mounting hole CL	46.2	±2.5	1.82	±.10
M7	Box end to component mounting hole location CL	132.7	±2.5	5.22	±.10
M8	Box end to bulkhead	330.2	±2.5	13.00	±.10
R1	Inside radius, box gasket flange	Radius shall be such that it is not be detrimental to the cover during shock			
W2	Box mounting hole CL to hole CL	679.5	±2.5	26.75	±.10
W5	Box edge to routing post hole location CL	95.2	±2.5	3.75	±.10
W6	Tie wrap rail location	54.1	±2.5	2.13	±.10
W7	Box edge to box mounting hole CL	19.1	±2.5	.75	±.10
W8	Box edge to bulkhead	276.4	±2.5	10.88	±.10

<sup>1/</sup> Inch equivalents are given for information only.

MIL-DTL-24728/10  
W/AMENDMENT 2


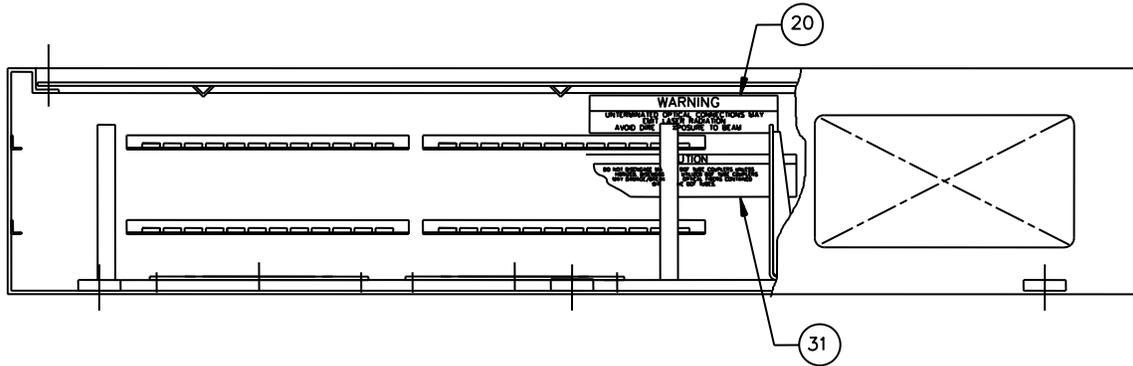


FIGURE 3. Box inside labels.

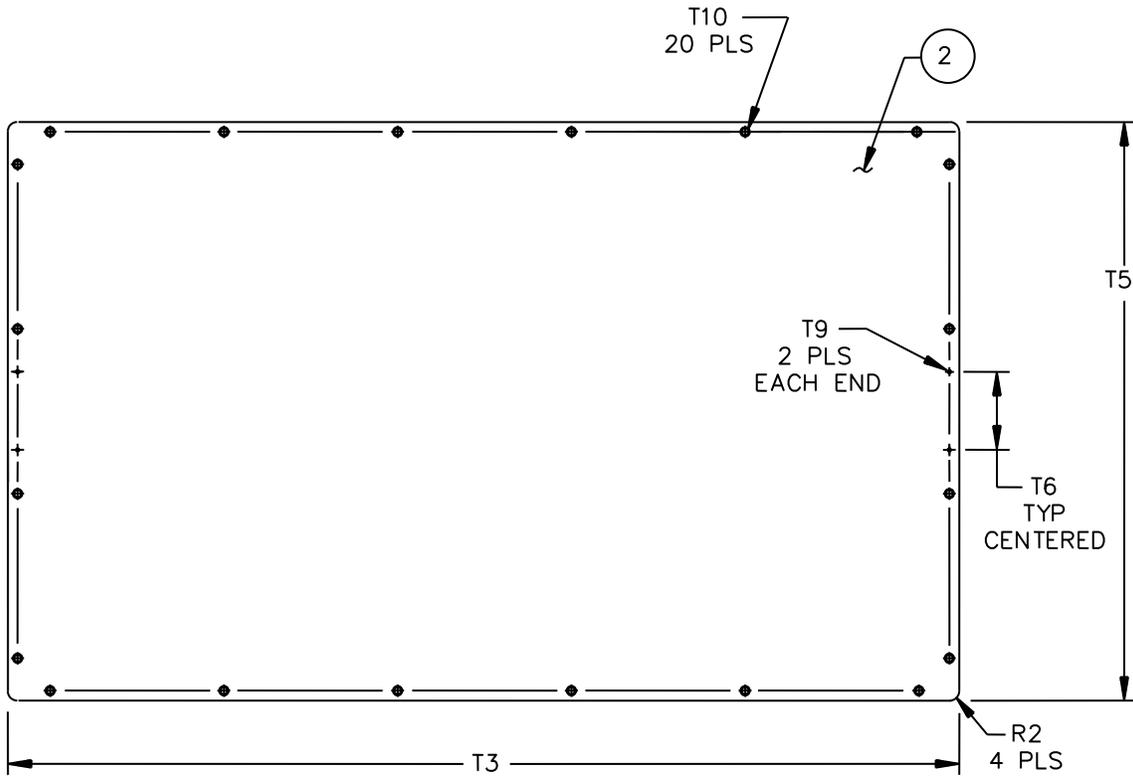

NOTE: For dimensions, see table III.


FIGURE 4. Cover.

MIL-DTL-24728/10  
W/AMENDMENT 2

TABLE III. Cover dimensions.

Designator	Descriptions	Dimensions <u>1/</u>			
		mm		inches	
		nom	tol	nom	tol
R2	Cover radius	9.7	±0.4	.38	±.02
T3	Cover length	962.2	±2.5	37.88	±.10
T5	Cover width	587.5	±2.5	23.13	±.10
T6	CL to CL nameplate mounting holes	79.38	±0.38	3.125	±.015
T9	Mounting hole, nameplate (tapped)			#6-32 UNC-2B	
T10	Cover bolt hole (tapped)			3/8-16 UNC	

1/ Inch equivalents are given for information only.

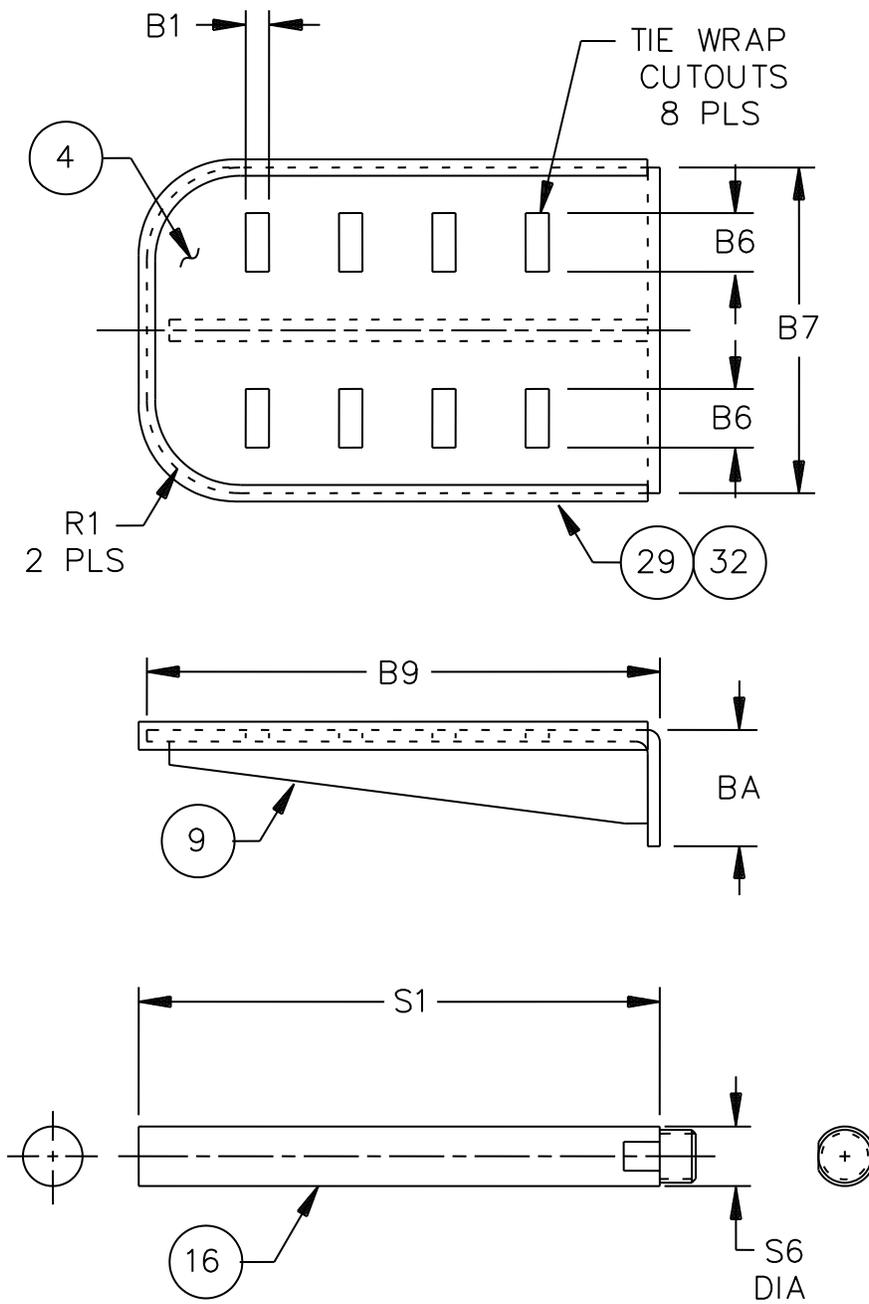

NOTE: For dimensions, see table IV.


FIGURE 5. Cable management pieces.

MIL-DTL-24728/10  
W/AMENDMENT 2

TABLE IV. Cable management pieces dimensions.

Designator	Descriptions	Dimensions <sup>1/</sup>			
		mm		inches	
		nom	tol	nom	tol
B1	Bulkhead slot height	6.4	±0.4	.25	±.02
B6	Bulkhead slot width	16.0	±0.4	.63	±.02
B7	Bulkhead width	88.9	±2.5	3.50	±.10
B9	Bulkhead height	139.7	±2.5	5.50	±.10
BA	Bulkhead foot length	31.8	±2.5	1.25	±.10
R1	Bulkhead radius	25.4	±2.5	1.00	±.10
S1	Routing post length	139.7	±2.5	5.50	±.10
S6	Routing post diameter	16.0	±0.4	.63	±.02

<sup>1/</sup> Inch equivalents are given for information only.

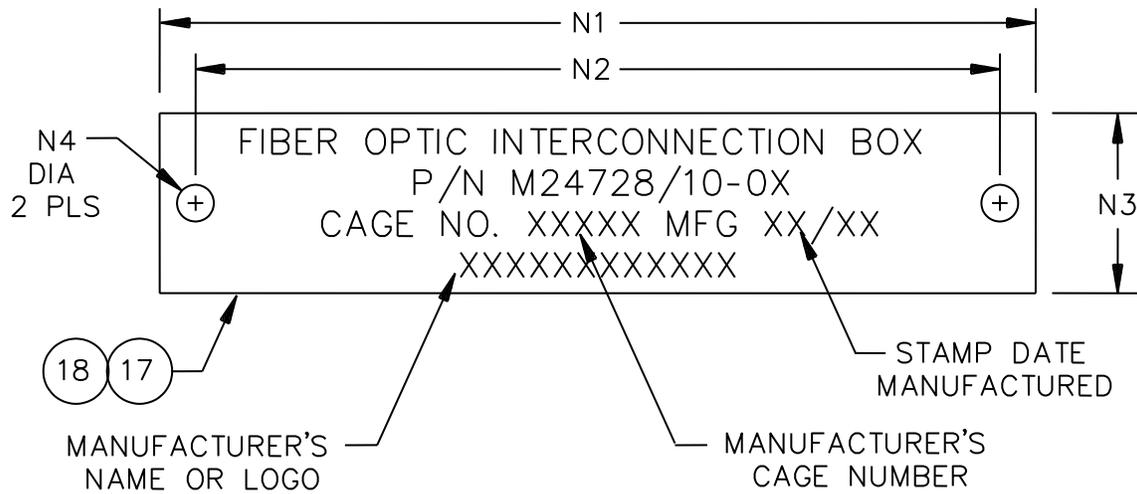


NOTES:

1. For dimensions, see table V.
2. Corners should be radiused.
3. Same overall and mounting dimensions apply to both subcomponents 17 and 18. Subcomponent 18 nameplate is blank.

FIGURE 6. Manufacturer's nameplate.

MIL-DTL-24728/10  
W/AMENDMENT 2

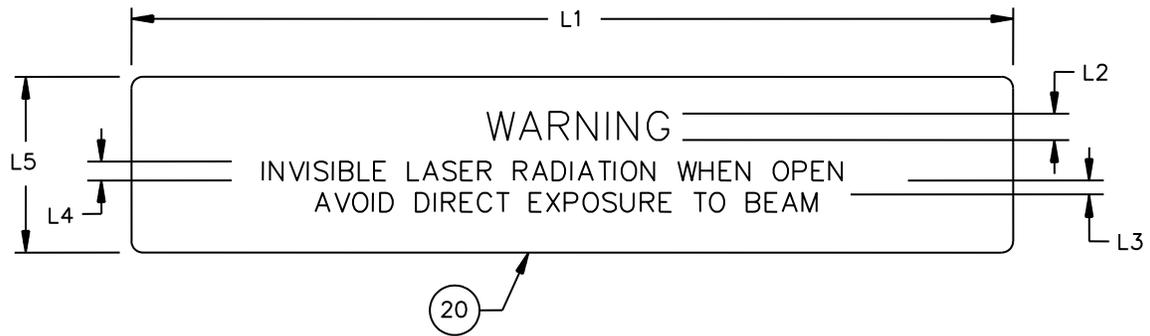

NOTES:

1. For dimensions see table V.
2. Corners should be radiused.
3. The signal word "WARNING" shall be in yellow on a black background in the upper panel. The lower panel shall consist of black letters on a yellow background.


FIGURE 7. Warning label (inside).

TABLE V. Manufacturer's nameplate and warning label (inside) dimensions.

Designator	Descriptions	Dimensions <sup>1/</sup>			
		mm		inches	
		nom	tol	nom	tol
N1	Nameplate length	89	min	3.5	min
N2	Nameplate mounting hole location	79.38	±0.38	3.125	±.015
N3	Nameplate width	16.0	min	.63	min
N4	Nameplate mounting hole diameter	3.96	±0.13	.156	±.005
L1	Warning label length	127	min	5.0	min
L2	WARNING height	5.1	min	.20	min
L3	Lettering spacing	1.5	typ	.06	typ
L4	Lettering height	4.8	typ	.19	typ
L5	Warning label height	25	min	1.0	min

<sup>1/</sup> Inch equivalents are given for information only.


MIL-DTL-24728/10  
W/AMENDMENT 2

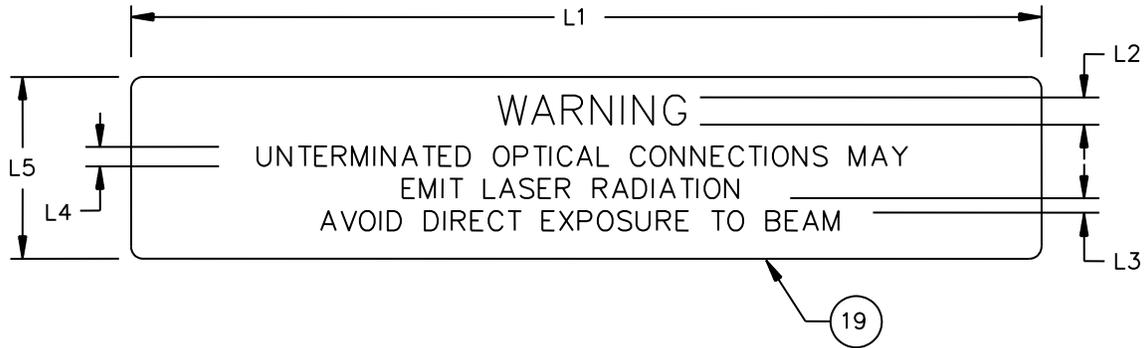

NOTES:

1. For dimensions see table VI.
2. Corners should be radiused.
3. The single word "WARNING" shall be in yellow on a black background in the upper panel. The lower panel shall consist of black letters on a yellow background.

FIGURE 8. Warning label (outside).

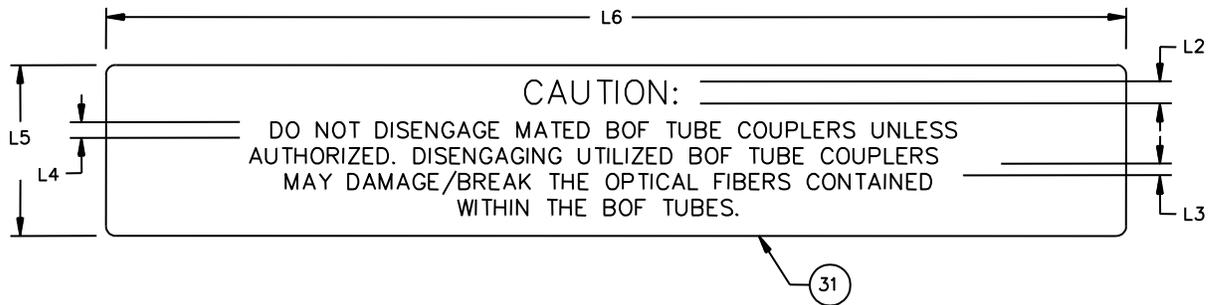

NOTES:

1. For dimensions, see table VI.
2. Corners should be radiused.


FIGURE 9. Caution label (inside and outside).

MIL-DTL-24728/10  
W/AMENDMENT 2

TABLE VI. Warning label (outside) and caution labels (inside and outside) dimensions.

Designator	Descriptions	Dimensions <u>1/</u>			
		mm		inches	
		nom	tol	nom	tol
L1	Warning label length	127	min	5.0	min
L2	Title height	4.8	min	.19	min
L3	Lettering spacing	1.5	typ	.06	typ
L4	Lettering height	3.3	typ	.13	typ
L5	Label width	25	min	1.0	min
L6	Caution label length	150	min	5.9	min

1/ Inch equivalents are given for information only.

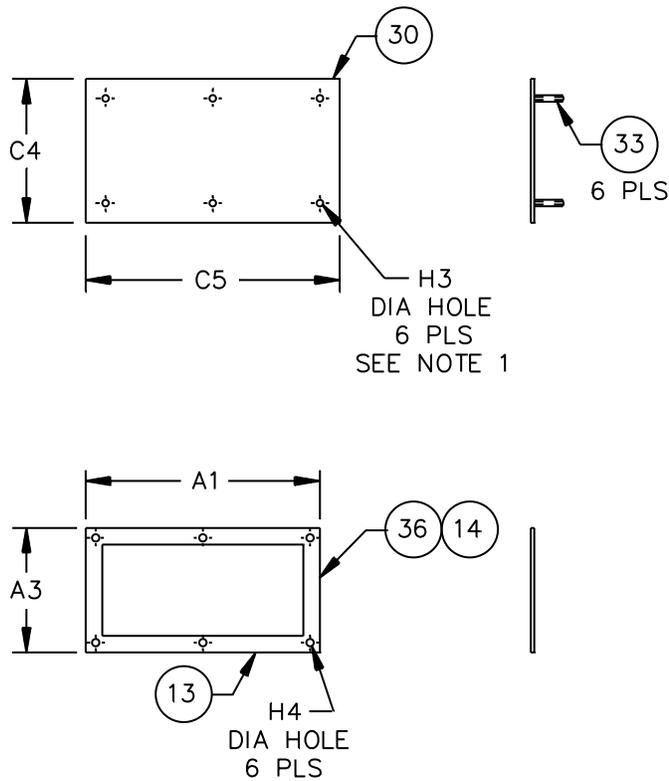

NOTES:

1. Do not deburr holes. Install subcomponent 33 near side 6 places.
2. For dimensions, see table VII.

FIGURE 10. Closeout plate assembly and backup plate.

MIL-DTL-24728/10  
W/AMENDMENT 2

TABLE VII. Closeout plate assembly and backup plate dimensions.

Designator	Descriptions	Dimensions <u>1/</u>			
		mm		inches	
		nom	tol	nom	tol
A1	Backup plate length	226.3	±2.5	8.91	±.10
A3	Backup plate height	120.7	±2.5	4.75	±.10
C4	Closeout plate height	139.7	±2.5	5.50	±.10
C5	Closeout plate length	245.4	±2.5	9.66	±.10
H3	Stud mounting hole diameter	6.3	typ	.25	typ
H4	Backup plate hole diameter	7.14	±0.13	.281	±.005

1/ Inch equivalents are given for information only.

MIL-DTL-24728/10  
W/AMENDMENT 2  
TABLE VIII. Parts list.

Subcomponent identification numbers, circled (see figure(s) 1 - 10)	Subcomponent name	Located in figure(s)	Quantity	Material (see notes)	Remarks (inches) 1/
1	Enclosure assy.	1	1		
2	Cover	1, 4	1	2	3.2 (.125) thk
3	Enclosure center	2	1	2	3.2 (.125) thk
4	Bulkhead	1, 2, 5	1	2	3.2 (.125) thk
6	Mounting bar	2	3	3	9.53 (.375) thk X 38.1 (1.50)
7	Mounting bar	2	8	3	9.53 (.375) thk X 31.8 (1.25)
8	Mounting bar	2	8	3	9.53 (.375) thk X 25.4 (1.00)
9	Stiffener, bulkhead	1, 5	1	2	3.2 (.125) thk X 130.3 (5.13) X 22.4 (.88)
10	Tie wrap rail	1, 2	12	2	
11	Stiffener, MCT	1	5	3	6.4 (.25) thk X 19.1 (.75) X 196.9 (7.75)
12	Helical insert	2	32	4	1/4-20 UNC-2A X 1/4 long
13	Backup plate	10	4	2	3.2 (.125) thk
14	Gasket, closeout plate	10	4	5	3.3 (.13) thk X 25.4 (1.00)
15	Gasket, cover/box	2		5	6/
16	Routing post	2, 5	6	3	16.0 (.63) dia
17	Nameplate	1, 6	1	7	MIL-DTL-15024
18	Nameplate, blank	1, 6	1	7	MIL-DTL-15024
19	Label, warning, outside	1, 8	1	8	MIL-DTL-15024
20	Label, warning, inside	3, 7	1	8	MIL-DTL-15024
21	Nut, self retaining	1	20	9	3/8-16UNC-2B
22	Washer, seal	1	20	4	3/8
23	Bolt, hex head, slotted captive	1	20	4	3/8-16 UNC-2A X 7/8 long
24	Washer, interference fit	1	20	15	3/8
25	Screw, nameplate	1	4	4	#6 -32 X 3/16 long
26	Washer, flat		24	4	1/4
27	Washer, split lock		24	4	1/4
28	Nut, hex		24	4	1/4-20 UNC-2B
29	Adhesive	1, 5	AR 10/	11	



MIL-DTL-24728/10  
W/AMENDMENT 2  
TABLE IX. PIN numbers.

PIN code	Description	Figure
01	Enclosure assembly, cover, and four (4) removable closeout plates assemblies (subcomponents 13, 14, and 33) with mounting hardware (subcomponents 26, 27, and 28)	1

REQUIREMENTS:

Design and construction: See figures 1 through 10 and tables I through VIII.

Materials: Unless otherwise specified, the enclosure assembly shall be constructed using the materials specified in table VIII.

Stress relief: Interconnection box shall be stress relieved in accordance with MIL-E-24142.

Finish: Enclosure shall have a chemical film, in accordance with MIL-DTL-5541, type II, class 1A (Alodine) prior to installing the helicoils in box assembly. Enclosure shall have one continuous film finish coat of grey polyester T GIC powder coating in accordance with MIL-PRF-24712, type IV, per PCI technical brief # 1, color 26307 of FED-STD-595. The powder coat will have a minimum film thickness of 2 mil after curing. Finish coat shall be applied prior to installing all gaskets, labels, nameplates and plastic edging with adhesive.

Non-magnetic materials: Not applicable.

Cable interconnection interface: The cable entry whether through a removable MCT in accordance with MIL-DTL-24705/4 or nylon stuffing tubes in accordance with ASTM F1836 shall accept cables having outer diameters between 7.75 mm (.31 inch) and 32.5 mm (1.28 inch) constructed in accordance with MIL-PRF-85045.

Unless otherwise specified, the interconnection box shall have closeout plate assemblies with dimensions of 245.4 mm (9.66 inch) and 139.7 mm (5.50 inch) for installation in the interconnection box specified herein, in lieu of removable MCTs in accordance with MIL-DTL-24705/4 or nylon stuffing tubes in accordance with ASTM F1836. These plates shall meet the requirements specified herein.

Mass: 45 kilograms (100 pounds) maximum.

Interconnection box mounting: See figure 2.

Interconnect organization:

Fiber, splice, connector identification: Not applicable.

Fiber optic interconnection modules: See table X.

MIL-DTL-24728/10  
W/AMENDMENT 2

TABLE X. Interconnection modules table.

	M24728/6	M24728/8-50	M24728/11-01
Max number of modules	4	4	4
Number of splice trays (Max splices per tray) <u>1/</u>		16 (192)	32 (384)
Number of FO Connector adapters	192		

NOTE

1/ Assuming use of M24728/51 splice tray with 12 splices per tray.

Cable organization:

Tie wrap rails. Interconnection box shall include twelve (12) tie wrap rails (see figures 1 and 2, subcomponent 10).

The tube routing region of the interconnection box shall provide for routing of MIL-PRF-85045 cables including blown optical (BOF) fiber tube cable. Tube routing region of interconnection box shall limit blown optical fiber tube bend diameter to 127 mm (5.0 inch) for 8 mm tubing and 102 mm (4.0 inch) for 5 mm tubing.

The interconnect region of interconnection box shall limit blown optical fiber tube bend diameter to 102 mm (4.0 inch) for 5 mm tubing. The interconnection region shall also limit the bend diameter of Optical Fiber Cable Components (OFCCs) as specified in MIL-PRF-85045/16.

Cable management within the enclosure shall be accomplished using the bulkhead, tie wrap rails and routing posts (subcomponents 4, 10, and 16 respectively).

VERIFICATION.

Inspection routine: Applicable with the following modifications. Spraytight shall be performed prior to shock.

Qualification item configuration: The interconnection box shall have 1 removable MCT in accordance with MIL-DTL-24705/4 and 3 closeout plate assemblies.

Environmental/mechanical inspections:

Shock: Applicable with the following modifications.

- a. Test setup, optical fiber splices assembled on M85045/16-02 in accordance with MIL-PRF-24623/6 stored in the splice tray and tray holder shall meet discontinuity requirements during the test and change in optical transmittance requirements after the test.

MIL-DTL-24728/10  
W/AMENDMENT 2

b. The following test conditions shall also apply:

- (1) Fore-aft testing shall be performed in addition to normal and athwartship orientations,
- (2) Use 90 degrees for athwartship and fore-aft testing,
- (3) Total weight on anvil plate shall not exceed 3400 lbs.
- (4) Testing shall be performed using hammer heights with anvil table travel limits in accordance with table XI.

TABLE XI. Fixed hammer heights and table travel limits

Fixed hammer height		Anvil table travel limit	
meter	Feet	millimeter	Inch
0.91	3.0	76.2	3.0
1.68	5.5	76.2	3.0
1.68	5.5	38.1	1.5

Vibration: Applicable with the following modification. Vibration test shall be performed with optical fiber splices assembled on M85045/16-02 in accordance with MIL-PRF-24623/6 stored in the tray and tray holder and shall meet discontinuity during the test and change in optical transmittance requirements after the test.

Structural integrity: Applicable except the assembled interconnection box shall not have a resonant frequency less than the maximum frequency specified in MIL-STD-167/1 type 1.

Temperature/humidity cycling: Applicable with the following modification. Testing shall be performed in accordance with TIA455.5, method B. The sub-cycle shall be included in the test. Change in optical transmittance is not applicable.

Temperature-life (life-aging): Applicable with the following modifications. Testing shall be performed in accordance with TIA455.4. Change in optical transmittance is not applicable. The following special test conditions and modifications to TIA455.4 shall apply to these tests:

- a. The specimen shall be exposed to dry air at  $85 \pm 3 / -0$  °C ( $185 \pm 5 / -0$  °F) for a period of 240 hours.
- b. Post test dimensional inspection shall be limited to E1, E2, and B4 (see figure 1 and table I) and T3 and T5 (see figure 4 and table III).

Thermal shock: Applicable with the following modification. Testing shall be performed in accordance with TIA-455-71, using test condition C-0. Post test dimensional inspection shall be limited to E1, E2, and B4 (see figure 1 and table I) and T3 and T5 (see figure 4 and table III). Change in optical transmittance is not applicable.

MIL-DTL-24728/10  
W/AMENDMENT 2

Operating temperature: Applicable with the following modifications. Optical fiber splices in accordance with MIL-PRF-24623/6 stored in the tray and tray holder shall meet the change in optical transmittance requirements. Testing shall be performed in accordance with TIA455.3 using the test condition schedule and soak times in accordance with table XI. The change in optical transmittance shall be measured during and after the test. A post test visual examination of the test specimens shall reveal no leakage of waterproofing compounds or other apparent loss of sealing capability, no surface or identification marking impairment, nor any damage detrimental to the operation of the test specimens. The operating temperature range shall be as specified herein.

TABLE XI. Temperature cycling steps.

Step	Action	Temperature °C (°F)	Duration
1	Maintain	Room ambient	4 hours (minimum)
2	Ramp to	Low operating temp +0/-3 (+0/-5)	2 hours
3	Maintain	Low operating temp +0/-3 (+0/-5)	8 Hours (minimum)
4	Ramp to	25 ±3 (77 ± 5)	2 hours
5	Maintain	25 ±3 (77 ± 5)	8 hours (minimum)
6	Ramp to	High operating temp +0/-3 (+0/-5)	1 hour
7	Maintain	High operating temp +0/-3 (+0/-5)	8 hours (minimum)
8	Ramp to	25 ±3 (77 ± 5)	1 hour
9	Maintain	25 ±3 (77 ± 5)	8 hours (minimum)
10	Repeat steps 2 through 9, four additional times, for a total of five (5) cycles.		

Change in transmittance: Applicable with the following modification. The change in optical transmittance of connector and splice installed in the fiber optic interconnection box in a standard manner shall not be greater than the maximum specified value of change in optical transmittance from the component specification.

Discontinuity: No discontinuity shall occur when tested in accordance with TIA-455-32 using equipment having a time resolution sufficient to resolve discontinuities of duration not less than 50 microseconds. A discontinuity is considered to be a reduction of signal strength defined by the component specification and for a duration defined by the component specification.

Cable retention: Not applicable.

Cable seal flexing: Not applicable.

Cable twist: Not applicable.

Compression resistance: Not applicable.

Impact: Not applicable.

Water pressure: Spraytight. The enclosure shall meet requirements as specified in MIL-STD-108, table II.

Fluid Immersion: Applicable.

Flammability: Not applicable.

MIL-DTL-24728/10  
W/AMENDMENT 2

Salt spray: Not applicable.

Flame spread: Not applicable.

Fungus: Applicable with the following modification. Subcomponents composed of materials not listed as fungus inert in guideline 4 of MIL-HDBK-454 shall be tested in accordance with TIA-455-56. The polymeric materials shall show sparse or very restricted microbial growth and reproduction with minor or inhibited substrate utilization. There shall be little or no chemical, physical, or structural change detectable.

Temperature:

Operating	-28 to +65°C	(-18.4 to +149°F)
Storage	-40 to +70°C	(-40 to +158°F)

Cover/box gasket (subcomponent 15) position is optional, but the gasket shall be one piece and not be damaged by, or impede removal or installation of, the interconnection box cover (subcomponent 2) and shall pass all requirements.

The closeout plate gasket (subcomponent 14) size is 139.7 mm (5.50 inch) wide x 245.4 mm (9.66 inch) long.

Removable MCT frames and compatible insert blocks are specified in MIL-DTL-24705/4.

Intended use:

The box has been designed with a tube routing region to accommodate a maximum of 14 MIL-PRF-85045/25 blown optical fiber tube cables. The tube routing region of the interconnection box should be used for routing and interconnecting of blown optical fiber tube cable.

The box also contains an interconnect region intended for the routing of OFCCs and 5 mm blown optical fiber tubing. The interconnect region shall have sufficient area and mounting capacity to accommodate four (4) M24728/6 (see MIL-I-24728/6) connector adapter panels, four (4) M24728/8-50 (see MIL-DTL-24728/8) splice tray holders, or four (4) M24728/11-01 (see MIL-DTL-24728/11) splice tray holders or any combination of these components four (4) units maximum).

Qualification by similiarity: Manufacturers who produce products for MIL-DTL-24728/9 and are qualified under MIL-DTL-24728/9 and produce products to this specification using the same materials and processes as the qualified product (MIL-DTL-24728/9) and pass size inspection, and workmanship specified herein, are qualified under this specification sheet.

MIL-DTL-24728/10  
W/AMENDMENT 2

Referenced documents. In addition to MIL-I-24728, this specification sheet references the following documents:

MIL-HDBK-454	MIL-DTL-24705/4	MIL-PRF-85045/16	NASM21266
FED-STD-595/26307	MIL-PRF-24712	MIL-PRF-85045/25	TIA455.3
MIL-DTL-5541	MIL-I-24728/6	MIL-STD-108	TIA455.4
MIL-PRF-6855	MIL-DTL-24728/8	MIL-STD-167/1	TIA455.5
MIL-DTL-15024	MIL-DTL-24728/9	ASTM B209	TIA-455-32
MIL-E-24142	MIL-DTL-24728/11	ASTM B221	TIA-455-56
MIL-PRF-24623/6	MIL-PRF-85045	ASTM F1836	TIA-455-71

The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:

Army - CR  
Navy - SH  
Air Force - 85  
DLA - CC  
NASA - NA

Preparing activity:

DLA - CC

(Project 6099-2015-001)

Review activities:

Army - AR, MI  
Navy - AS, CG, EC, MC  
Air Force - 19, 93, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.