

INCH-POUND



MIL-PRF-64266/3B
 3 February 2014
 Superseding
 MIL-PRF-664266/3A
 6 January 2012

PERFORMANCE SPECIFICATION SHEET

**CONNECTORS, FIBER OPTIC, CIRCULAR, RECEPTACLE STYLE,
 MULTIPLE REMOVABLE TERMINI, SCREW THREADS,
 JAMNUT MOUNTING, ENVIRONMENT RESISTING**

This specification is approved for use by all Departments
 and Agencies of the Department of Defense.

The requirements for acquiring fiber optic connectors described
 herein shall consist of this specification sheet and MIL-PRF-64266.

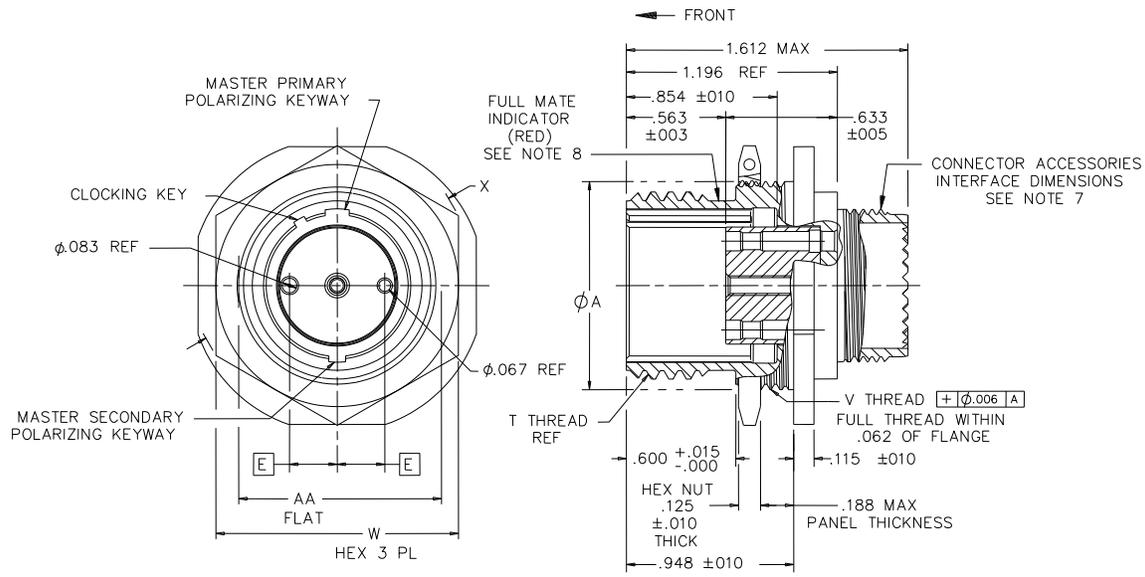

Inches	mm	Inches	mm
.003	.08	.125	3.18
.005	.13	.188	4.78
.006	.15	.563	14.30
.010	.25	.620	15.75
.015	.38	.633	16.08
.067	1.70	.854	21.69
.083	2.11	.948	22.56
.115	2.92	1.196	30.38
		1.612	40.95




FIGURE 1. Jamnut receptacle connector.
 AMSC N/A

FSC 6060

Shell size	A dia max	F flat	G dia $\pm .010$	T class 2A blunt start	V thread class 2A	W 3 PLS
11	.875(22.23)	1.264(32.11)	1.358(34.49)	.7500-.1P -.2L-DS	.875-20 UNEF	1.075 (27.30) 1.045(26.54)
13	1.000(25.40)	1.264(32.11)	1.498(38.05)	.8750-.1P -.2L-DS	1.000-20 UNEF	1.205(30.61) 1.171(29.74)
15	1.1875(30.17)	1.264(32.11)	1.671(42.44)	1.062-.1P -.2L-DS	1.1875- 18 UNEF	1.392(35.36) 1.358(34.49)
23	1.625(41.28)	2.004(50.90)	2.098(53.29)	1.5000-.1P -.2L-DS	1.625-18 UNEF	1.812(46.03) 1.778(45.16)

Shell size	X Hex corner max	Y Dia $\pm .005$	Z Flat $\pm .005$	AA Flat
11	1.290(32.77)	.885(22.48)	.848(21.54)	.841(21.36) .832(21.13)
13	1.435(36.45)	1.010(25.65)	.973(24.71)	.966(24.54) .957(24.31)
15	1.650(41.91)	1.198(30.43)	1.160(29.46)	1.153(29.29) 1.144(29.06)
23	2.093(53.16)	1.630(41.40)	1.593(40.46)	1.587(40.31) 1.578(40.08)

See notes on next page.

FIGURE 1. Jamnut receptacle connector - Continued.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents (mm) are in parentheses.
4. Dimensions apply to plated/finished part.
5. Mating key positions and dimensions are shown on figure A-3 of MIL-PRF-64266.
6. Connector receptacle interface dimensions shall be in accordance with MIL-PRF-64266, figure A-2.
7. Back end connector design for attachment of non-rotatable backshell. Connector backshell accessory interface shall be in accordance with MIL-PRF-64266, figure A-6.
8. The color band shall be yellow and the full mate indicator shall be red in accordance with EIA-359 for all shell sizes. Dimension criteria for full mate indicator are shown in appendix A, figure A-2 of MIL-PRF-64266.
9. Insert retention mechanism not shown.
10. For connector insert arrangements and interface dimensions, see appendix B, figures B-1 through B-6 of see MIL-PRF-64266.

FIGURE 1. Jamnut receptacle connector - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and MIL-PRF-64266 appendix A, figure A-2, and figure A-4.

Weight (without termini): See table I

TABLE I. Weight (without termini).

Sell size	Weight, max.	
	ounces	grams
11	2.0	56.7
13	2.5	70.875
15	3.0	85.05
23	4.3	121.905

Fiber optic cable:

Cable diameter: .094 inch (2.39 mm) maximum.

Protective caps: Each connector shall be supplied with protective caps over the front and rear portions of the connector.

Insert arrangement: See appendix B of MIL-PRF-64266 for desired shell size. Insert shall be marked with the identification numbers of the insert cavity positions on both the front and rear faces.

Termini: Genderless. See MIL-PRF-29504/18. For dummy terminus, see MIL-PRF-29504/19. For keyed terminus, see MIL-PRF-29504/20.


Alignment Sleeve retainer (ASR): A MIL-PRF-64266/9 ASR shall be installed in the receptacle as part of this PIN.

Cleaning procedures: Each shipment of connectors shall include recommended cleaning procedures. The following wording or equivalent is recommended: "To clean, use lint free wipe dampened with alcohol and blow dry with air".

Shell polarization: 1 through 12 keyway positions. See MIL-PRF-64266 appendix A, figure A-3.

Marking:

Part or Identifying Number (PIN): Mark on flange of connector receptacle (see table II and III).

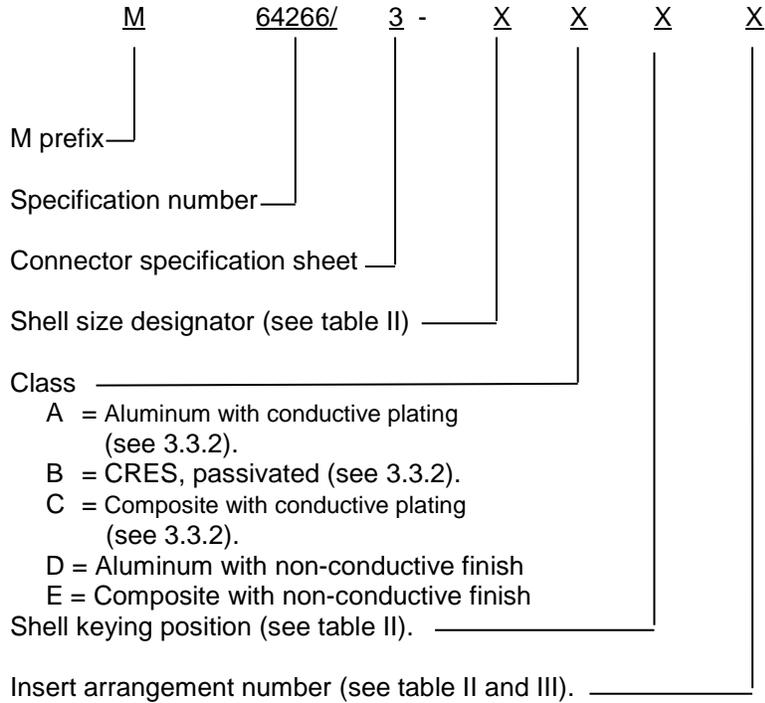

PIN Examples: M64266/3-B11
 M64266/3-BAC4

MIL-PRF-64266/3B
 TABLE II. PIN designators.

Shell size	Shell size designator	Insert arrangement number
11	B	1, 2
13	C	1
15	D	1, 2
23	H	1, 2

TABLE III. Insert arrangement.

Insert arrangement number	Number of insert cavities (termini per connector) for each shell size <u>2/</u>			
	Shell size 11	13	15	23
1	2	6	8	36
2	4	NA	10	NA
3	2	6	8	36
4	4	NA	10	NA

Notes:

1/ Insert arrangement number is no longer based on if the terminus type (non-keyed or keyed). All insert cavities for a MIL-PRF-64266 connector are keyed.

2/ Insert arrangement number is based on the number of cavities in the insert (number of termini that can be placed into the connector).

Sealing gasket or o-ring: The receptacle shall include a sealing gasket or o-ring to seal between the receptacle flange and the mounting panel.

Mating counterpart: Plug connectors specified in MIL-PRF-64266/2.

Installation and removal tools: As specified in NAVSEA drawing 8283460. A copy of this document can be obtained at web site: <https://fiberoptics.nswc.navy.mil>.

For qualified products listing, quality conformance, and periodic inspections, dummy termini shall be used in all unused cavities.

Changes from previous issue: The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This is done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of the document based on the entire contents irrespective of the marginal notation and relationship to the last previous issue.

Referenced documents. In addition to MIL-PRF-64266, this specification sheet references the following documents:

MIL-PRF-29504/18	MIL-PRF-64266/9
MIL-PRF-29504/19	NAVSEA drawing 8283460
MIL-PRF-29504/20	EIA-359
MIL-PRF-64266/2	

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - SH
Air Force - 85
DLA - CC

Preparing activity:

DLA - CC

(Project 6060-2014-018)

Review activities:

Army - MI
Navy - AS
Air Force - 13, 19, 93, 99
NASA - NA

NOTE: The activities listed above were interested in this document on the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.