

MILITARY SPECIFICATION

TERMINI, FIBER OPTIC CONNECTOR, REMOVABLE,
 GENERAL SPECIFICATION FOR

This amendment forms a part of MIL-T-29504A, dated 19 December 1989, and is approved for use by all Departments and Agencies of the Department of Defense.


PAGE 5

- 3.7.6. line 2: Delete "22 pounds" and substitute "10.0 kg."
- 3.7.6. line 3: Delete "0.15 (0.38 mm)" and substitute "0.38 mm (0.15 in)."
- 3.7.6. line 4: Delete ".015 (0.38 mm) but must return to within .015 inch" and substitute "0.38 mm (.015 inch) but must return to within 0.38 mm."

PAGE 6

3.8: Delete and substitute:

3.8 PIN construction. Each terminus shall be identified by four distinct color bands indicating the TICC as specified herein (see 3.1, 3.9, and appendix A). The PIN shall be as specified in the military specification sheets (see 3.1), but shall be defined in the following format:

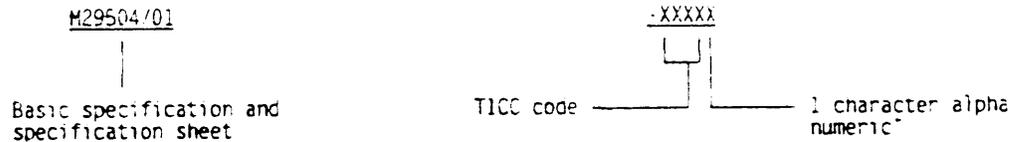

PAGE 7

Figure 1: Delete "Manufacturer's symbol or trademark (see 3.8.1)" and substitute "Manufacturer's symbol or trademark (see 3.9.1)."

PAGE 15

4.7.4: Delete the last sentence and substitute:

"The terminus may be removed from its operational position and the alignment sleeve may be removed to facilitate cleaning (see 3.7.4)."

PAGE 16

4.7.12: Add the following at the end of the paragraph:

"Optical discontinuities shall be measured during the test (see 4.6.2)."

4.7.13: Add the following at the end of the paragraph:

"Optical discontinuities shall be measured during the test (see 4.6.2)."

MIL-1-29504A
AMENDMENT 1

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - SH
Air Force - 85
NASA - NA

Review Activities:

Army - AF, MI
Navy - AS, CG, EC, MC, YD
Air Force - 17, 19, 80, 99
DLA - ES

Preparing Activity:
Navy - SH

Agent:
DLA - ES

(Project 6060-0114)