


MILITARY SPECIFICATION SHEET

FIBER, OPTICAL, TYPE II, CLASS 5, SIZE II, COMPOSITION A,  
WAVELENGTH D, RADIATION HARDENED (METRIC)

This specification is approved for use by all Depart-  
ments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist  
of this specification sheet and the issue of the following specification listed  
in that issue of the Department of Defense Index of Specifications and Standards  
(DODISS) specified in the solicitation: MIL-F-49291.

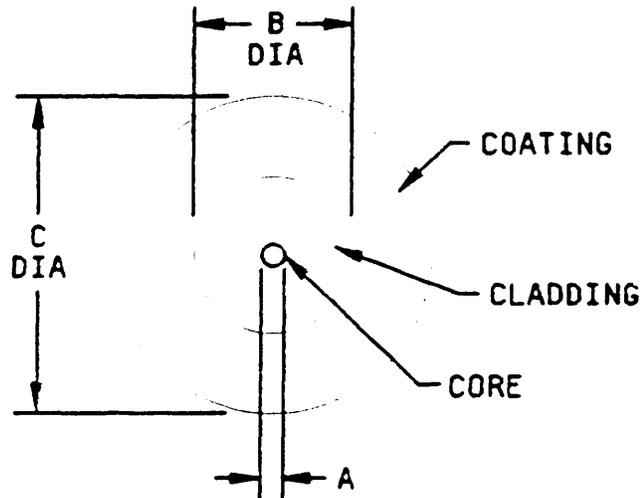

PIN	Dimensions		
	A (μm)	B (μm)	C (μm)
M49291/7-01	<u>1</u> /	125 ± 1	250 ± 15
M49291/7-01A	<u>1</u> /	125 ± 1	250 ± 15
M49291/7-02	<u>1</u> /	125 ± 1	500 ± 25
M49291/7-02A	<u>1</u> /	125 ± 1	500 ± 25

1/ Core diameter is not a specified attribute. Refer to the mode field diameter specifications.

FIGURE 1. Dimensions and configuration of optical fiber construction.

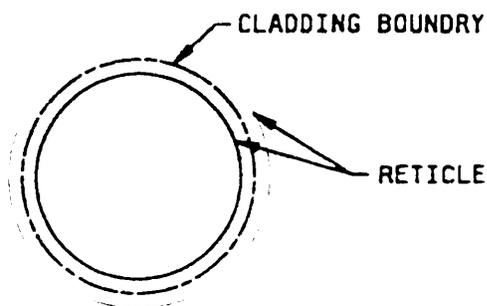

Circle (solid)	Diameter ( $\mu\text{m}$ )
Inner	124.0
Second	126.0

FIGURE 2. Tolerance fields.

## DIMENSIONS AND CONFIGURATION:

Diameter: See figures 1 and 2.

## Ovality:

Core: Not applicable.  
Cladding:  $\leq 2$  percent.

## Offset:

Core-to-cladding:  $\leq 1 \mu\text{m}$ .  
Fiber-to-coating: coating-cladding concentricity error  $\leq 10.5 \mu\text{m}$ .  
(overall coating concentricity ratio (OCCR)  $\geq 0.70$  for  $250 \mu\text{m}$  diameter coatings and  $\geq 0.84$  for  $500 \mu\text{m}$  diameter coatings).

Mode field diameter: Nominal range 8.5 to 10.0  $\mu\text{m}$ , maximum tolerance of each individual production unit  $\pm 0.7 \mu\text{m}$ .

Splices: Not allowed.

Tensile strength (proof test): 690 MPa.

Fiber mass/unit length: 0.1 kg/km maximum.

Change in optical transmittance: Measurements to be made at  $1310 \pm 20 \text{ nm}$ .

Maximum attenuation rate: 0.4 dB/km at  $1310 \pm 20 \text{ nm}$   
0.3 dB/km at  $1550 \pm 20 \text{ nm}$

Numerical aperture: Not applicable.

Bandwidth: Not applicable.

Chromatic dispersion:  $\leq 3.2 \text{ ps/nm/km}$  at  $1310 \text{ nm} \pm 20 \text{ nm}$ ,  $\leq 22 \text{ ps/nm/km}$  at  $1550 \pm 20 \text{ nm}$ .

Attenuation uniformity: Applicable, except that measurements are to be performed at  $1310 \pm 20 \text{ nm}$ .

Transient Attenuation: Not applicable.

Macrobend attenuation: Performed at  $1310 \pm 20 \text{ nm}$ .

## ENVIRONMENTAL:

Temperature range: See table I.

TABLE I. Temperature range.

PIN	Operating (°C)	Nonoperating (°C)	Storage (°C)
M49291/7-01 M49291/7-02	-46 to +85	-55 to +85	-55 to +85
M49291/7-01A M49291/7-02A	-46 to +85	-55 to +85	-55 to +85

Fluid immersion aging: Not applicable.

Dynamic tensile strength: Applicable.

Flexure: Applicable.

Fungus: Applicable.

Storage temperature: Applicable.

Nuclear radiation resistance: Nuclear radiation resistance requirements and test conditions shall be as shown below and in tables II through VI:

Light launch conditions: In accordance with EIA/TIA-455-78.

Wavelength:  $1310 \pm 25$  nm.

Source type: Laser diode with FWHM spectral width  $\leq 10$  nm.

TABLE II. Nuclear radiation requirement applicability.

PIN	Steady state gamma	Prompt gamma	Neutron
M49291/7-01 M49291/7-02	Applicable	Not applicable	Not applicable
M49291/7-01A M49291/7-02A	Applicable	Applicable	Applicable

TABLE III. Steady state gamma radiation test conditions.

PIN	Test Temperature (°C)	Dose rate rad (Si)/sec	Total Dose (rad (Si))
M49291/7-01 M49291/7-02	-28 $\pm$ 2 25 $\pm$ 2 85 $\pm$ 2	50 +0, -20	Classified
M49291/7-01A M49291/7-02A	-46 $\pm$ 2 25 $\pm$ 2 71 $\pm$ 2	3000 +0, -20	3000

TABLE IV. Prompt gamma radiation test conditions.

Parameter	Value
Test temperature (°C)	-46 ±2 25 ±2 71 ±2
Total dose (rad (Si))	≥ 450
Pulse duration (ns)	≤ 100
Dose rate (rad (Si)/sec)	1.4 x 10 <sup>10</sup> nominal
Dose deposition profile	variance ≤ 20 percent
Energy spectrum	simulate hard x-ray with end point energy ≥ 2 MeV

TABLE V. Neutron radiation test conditions.

Parameter	Value
Test temperature (°C)	-46 ±2 25 ±2 71 ±2
Nominal fluence	1.0 x 10 <sup>12</sup> neutrons/cm <sup>2</sup>
Pulse duration (ms)	≤ 1
Equivalent energy	1.0 MeV equivalent damage in silicon (Si)
Dose deposition profile	variance ≤ 10 percent
Gamma radiation total dose	Minimized to the maximum extent practicable

(Some nuclear radiation resistance characteristics of this optical fiber are classified and shall be obtained from the qualifying activity. Application to receive these requirements must be made through the US Naval Sea Systems Command, ATTN: SEA 03K12, Washington, DC 20362. Information concerning security clearance classification and "need to know" must be detailed in the request.)

TABLE VI. Radiation test requirements.

PIN	Maximum induced attenuation (dB/km)	Attenuation at specified recovery time (dB/km)	Specified recovery time (sec)
M49291/7-01 M49291/7-02	≤ 50 <u>1/</u>	≤ 15 @ -28°C ≤ 5 @ 25°C ≤ 5 @ 85°C <u>1/</u>	1000
M49291/7-01A M49291/7-02A	None	≤ 2.0 @ -46°C ≤ 1.5 @ 25°C ≤ 1.0 @ 71°C <u>1/</u>	<u>2/</u>

1/ The radiation induced loss for a given threat. The total dose associated with the threat is classified and not necessarily equal to the test total dose.

2/ There is no specified maximum recovery time. However, the time taken to recover within the specified maximum attenuation shall be recorded.

## QUALITY CONFORMANCE:

In group A testing single-mode fiber attenuation may be measured using EIA-455-61.

In group B testing the mechanical strippability test may be omitted if the optical fiber coatings have not changed from when the mechanical strippability test was last performed. The manufacturer shall provide a certificate of compliance for mechanical strippability in the group B test report.

Part or identifying number (PIN). (see figure 1 and table VII):

M49291/7-01.  
M49291/7-01A.  
M49291/7-02.  
M49291/7-02A.

TABLE VII. Supersession data.

PIN	Superseding
M49291/7-01	M49291/01-007 <u>1/</u>
M49291/7-01A	None
M49291/7-02	None
M49291/7-02A	None

1/ PIN is as shown in MIL-F-49291/7(NAVY).

## CONCLUDING MATERIAL

Custodians:  
Army - CR  
Navy - SH  
Air Force - 85  
NASA - NA

Review Activities:  
Army - MI, SC  
Navy - AS  
Air Force - 17  
DLA - ES

Preparing Activity:  
Navy - SH

Agent:  
DLA - ES

(Project 6010-0040-02)

