


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, CLOSED ENDED,
WITH FLARED ENTRY, WITH 2 OFFSET (SIDE) MOUNTING HOLES

The General Services Administration has authorized the use of this
commercial item description (CID) for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and
the latest issue in effect of [A-A-55563](#).

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID)
specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in
the following example (see [notes](#)).

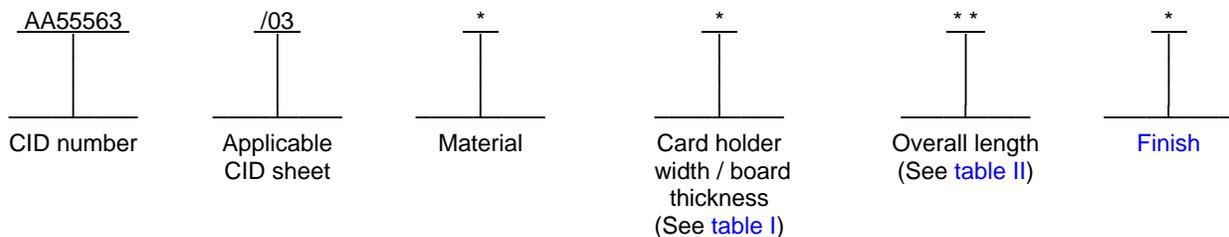

Example: AA55563/03BA30H is the PIN for a silver plated beryllium copper, 3.0 inch (76.2 mm) long, narrow profile
card guide with two mounting holes. The card guide is designed to accommodate circuit card assemblies with printed
board thicknesses of .031 inch (0.76 mm) and the mounting holes are offset.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified
herein (see [figure 1](#), [table I](#), and [table II](#)) and meet the general requirements specified in CID [A-A-55563](#).

Material type. Materials types shall be defined in [A-A-55563](#). The applicable material type designators for this CID
specification sheet are "A" (beryllium copper 1/4 H, temper TD01), "B" (beryllium copper 1/4 HT, temper TH01), or "D"
(stainless steel 1/4 H). The material type designator and shall be included in the PIN.


Material thickness. The material thickness shall be .008 inch (0.20 mm) .

Card holder width/board thickness. The card holder width/board thickness shall be defined in table I herein and is
shown in figure 1 as dimensions "D" and "T". The applicable card holder width/board thickness designators for this
CID specification sheet are A, B, C, or D and shall be included in the PIN.

Overall length. Overall length shown on [figure 1](#) as dimension "L", and is displayed in [table II](#) herein. Applicable
overall length designator "20", "25", "30", "35", "40", "45", "50", "55", "60", "65", "70", or "75" shall be included in the
PIN.

Finish. Finish materials types shall be defined in A-A-55563. Applicable finish materials designators "C" (copper plate), "D" (black ebonal), "E" (gold plate), "F" (nickel plate), "H" (silver plate), "J" (zinc, yellow chromate), "K" (no finish), or "R" (zinc, clear chromate) are available for material type designators "A" and "B". Finish designator "G" (passivate) is the only finish available for material type designator "D" (stainless steel). The finish designator shall be included in the PIN.

Mounting hole spacing. Mounting hole spacing is shown on figure 1 as dimension "M". Dimension "M" is listed in table II herein.

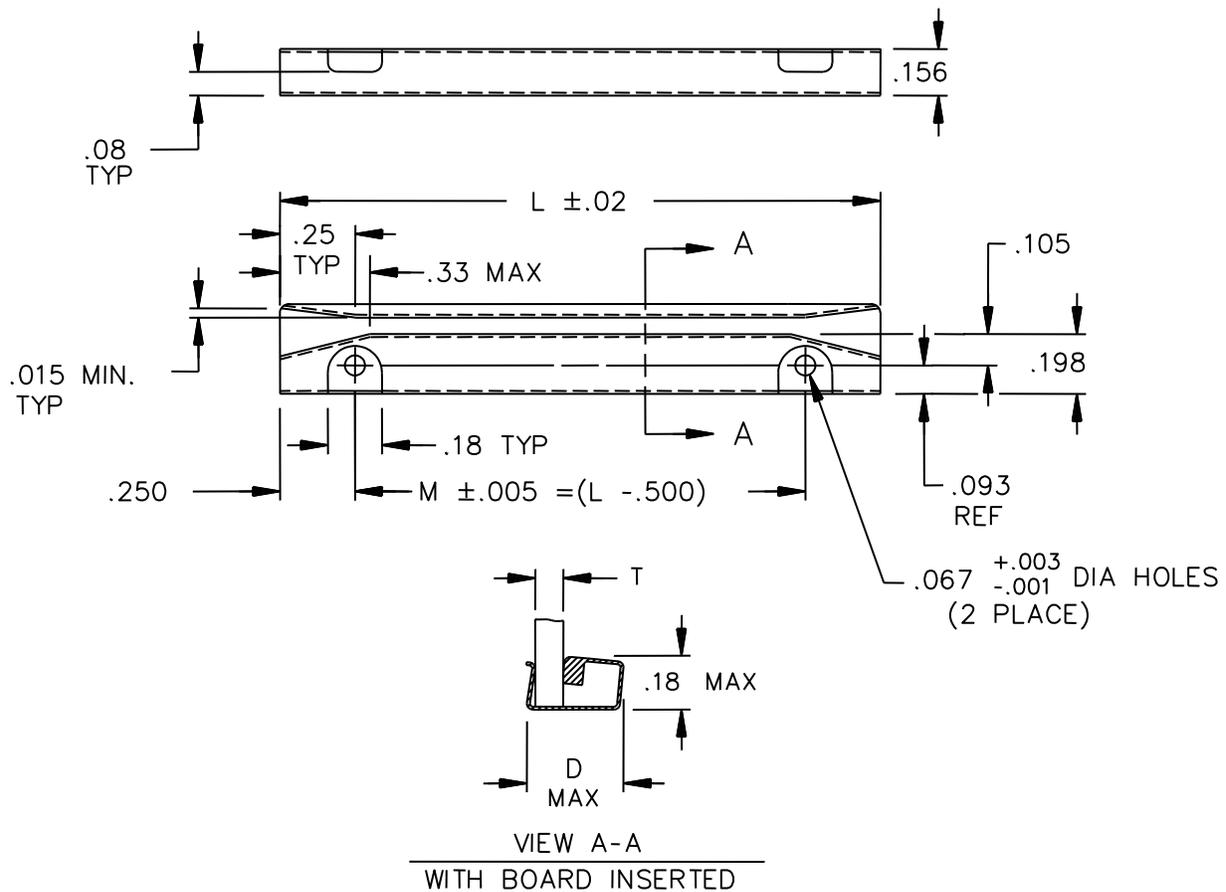

Inches	mm								
.001	0.03	.015	0.38	.093	2.36	.180	4.57	.310	7.87
.003	0.08	.020	0.51	.125	3.18	.198	5.03	.520	13.21
.005	0.13	.067	1.72	.156	3.96	.250	6.35		

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm), for 2 places and ±.010 inc (0.25 mm), for 3 places.

FIGURE 1. Card holder design and dimensions.

TABLE I. Card holder width/board thickness dimensions (see [figure 1](#)).

PIN designator for card holder width / board thickness	Fractional equivalent	Card holder width ^{1/} ^{2/} Dimension "D" max		Board thickness ^{1/} ^{2/} ^{3/} Dimension "T" ref	
		Inches	mm	Inches	mm
A	1/32	.36	9.14	.0312	0.76
B	1/16	.36	9.14	.0625	1.52
C	3/32	.36	9.14	.0937	2.29
D	1/8	.40	10.16	.1250	3.30

^{1/} See dimensions "D" and "T" in view A – A of [figure 1](#).

^{2/} Do not use card holder width/board thickness, dimensions "D" or "T" for PIN construction.

^{3/} Dimension "T" is given as reference.

TABLE II. Length and hole spacing. ^{1/}

PIN designator for overall length	Dimension "L" ±.020 (0.51)		Dimension "M" ±.005 (0.13)	
	Inches	mm	Inches	mm
20	2.0	51	1.75	44.5
25	2.5	54	2.25	57.2
30	3.0	76	2.75	69.9
35	3.5	89	3.25	82.6
40	4.0	102	3.75	95.3
45	4.5	114	4.25	108.0
50	5.0	127	4.75	120.7
55	5.5	140	5.25	133.4
60	6.0	152	5.75	146.1
65	6.5	165	6.25	158.8
70	7.0	178	6.75	171.5
75	7.5	191	7.25	184.2

^{1/} Dimensions are in inches. Millimeters are given for general information only.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

[A-A-55563](#) – Holder, Electrical Card, Metal Card Guide, General Requirements For.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch/> or <https://assist.daps.dla.mil/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Ordering data. Ordering data is as specified in [A-A-55563](#).

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

<u>Manufacturer CAGE</u>	<u>Manufacturer name and address</u>	<u>Manufacturer contact information</u>
18915	Birtcher – A Division of Pentair Technical Products 7328 Trade Street San Diego, CA 92121-3410	Telephone: (858) 740-2400 Toll Free: (800) 854-7086 Facsimile: (858) 679-4555 URL: www.birtcherproducts.com
65884	Sigmaton, Incorporated 4549 Gateway Circle Dayton, OH 45440-1792	Tel: (937) 435-2129 Fax: (937) 435-6375 E-mail: sigmaton@ameritech.net URL: www.sigmaton.com

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following manufacturer's P/Ns in table III as shown. The CID PINs listed in table II cover the different lengths available. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial P/N supersession data.

CID PIN; AA55563/03@#\$\$& 1/				Manufacturers 2/	
<u>Material type</u>	<u>Card holder width/board thickness (see table I)</u>	<u>Overall length (see table II)</u>	<u>Finish (& 3/)</u>	CAGE 19815 4/	CAGE 65884 5/
A	#	20	&	35F-6B-T-4-F	AA55563/03A#20&
A	#	25	&	35F-6B-T-5-F	AA55563/03A#25&
A	#	30	&	35F-6B-T-6-F	AA55563/03A#30&
A	#	35	&	35F-6B-T-7-F	AA55563/03A#35&
A	#	40	&	35F-6B-T-8-F	AA55563/03A#40&
A	#	45	&	35F-6B-T-9-F	AA55563/03A#45&
A	#	50	&	35F-6B-T-10-F	AA55563/03A#50&
A	#	55	&	35F-6B-T-11-F	AA55563/03A#55&
A	#	60	&	35F-6B-T-12-F	AA55563/03A#60&
A	#	65	&	35F-6B-T-13-F	AA55563/03A#65&
A	#	70	&	35F-6B-T-14-F	AA55563/03A#70&
A	#	75	&	35F-6B-T-15-F	AA55563/03A#75&

See footnote at end of table.

TABLE III. Commercial P/N supersession data – Continued.

CID PIN; AA55563/03@#\$\$& 1/				Manufacturers 2/	
Material type	Card holder width/board thickness (see table I)	Overall length (see table II)	Finish (&) 3/	CAGE 19815 4/	CAGE 65884 5/
B	#	20	&	35F-6BH-T-4-F	AA55563/03B#20&
B	#	25	&	35F-6BH-T-5-F	AA55563/03B#25&
B	#	30	&	35F-6BH-T-6-F	AA55563/03B#30&
B	#	35	&	35F-6BH-T-7-F	AA55563/03B#35&
B	#	40	&	35F-6BH-T-8-F	AA55563/03B#40&
B	#	45	&	35F-6BH-T-9-F	AA55563/03B#45&
B	#	50	&	35F-6BH-T-10-F	AA55563/03B#50&
B	#	55	&	35F-6BH-T-11-F	AA55563/03B#55&
B	#	60	&	35F-6BH-T-12-F	AA55563/03B#60&
B	#	65	&	35F-6BH-T-13-F	AA55563/03B#65&
B	#	70	&	35F-6BH-T-14-F	AA55563/03B#70&
B	#	75	&	35F-6BH-T-15-F	AA55563/03B#75&
D	#	20	G	35F-6CR-T-4-1	AA55563/03D#20G
D	#	25	G	35F-6CR-T-5-1	AA55563/03D#25G
D	#	30	G	35F-6CR-T-6-1	AA55563/03D#30G
D	#	35	G	35F-6CR-T-7-1	AA55563/03D#35G
D	#	40	G	35F-6CR-T-8-1	AA55563/03D#40G
D	#	45	G	35F-6CR-T-9-1	AA55563/03D#45G
D	#	50	G	35F-6CR-T-10-1	AA55563/03D#50G
D	#	55	G	35F-6CR-T-11-1	AA55563/03D#55G
D	#	60	G	35F-6CR-T-12-1	AA55563/03D#60&
D	#	65	G	35F-6CR-T-13-1	AA55563/03D#65&
D	#	70	G	35F-6CR-T-14-1	AA55563/03D#70&
D	#	75	G	35F-6CR-T-15-1	AA55563/03D#75&

1/ At sign (@) denotes material type, pound sign (#) denotes card holder width/board thickness, dimension "D" (see figure 1 herein), dollar signs (\$\$) denotes overall length dimension "L" (see figure 1 herein, and A-A-55563), and the ampersand (&) denotes finish.

EXAMPLE PIN: AA55563/03BA30H represents a metal card guide, closed ended, with flared entry, with 2 offset (side) mounting holes; base material is beryllium copper 1/4 HT, temper TH01, card holder width/board thickness, dimension "D", is .36 inch (9.14 mm), dimension "T" is .0312 inch (0.76 mm), commonly known as having a board thickness of "1/32"; the overall length is 3.0 inches (76.2 mm), dimension "L"; and the finish is silver plate.

TABLE III. Commercial P/N supersession data – Continued.

- 2/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph of the basic CID.
- 3/ Finish materials designator "C", "D", "E", "F", "H", "J", "K", or "R" are available for this material type (see [Finish](#) for a description of the designators).
- 4/ MFG CAGE 18915 the series type is "35F-6" (with flare), the letters "B", "BH", OR "CR" denotes material type, the letter "T" denotes card holder width/board thickness, the numbers "4" through "15" denotes card holder lengths, and the letter "F" denotes finish material.
- 5/ MFG CAGE 65884 catalog PIN's are the same as this CID sheet. See 1/ above.

MILITARY INTERESTS:

Custodians:
Navy – EC
Air Force – 99
DLA – CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS
Preparing Activity
DLA – CC
Project 5998–2011–013

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil/>.