

MILITARY SPECIFICATION

CAPACITORS, FIXED, ELECTROLYTIC
 (DC. ALUMINUM, DRY ELECTROLYTE, POLARIZED),

GENERAL SPECIFICATION FOR


This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general requirements for polarized, dry-electrolyte, aluminum, direct current (dc), fixed capacitors for use in filter and bypass circuits where large excesses of capacitance over the nominal capacitance can be tolerated.

1.2 Classification.

1.2.1 Type designation. The type designation shall be in the following form, and as specified (see 3.1):

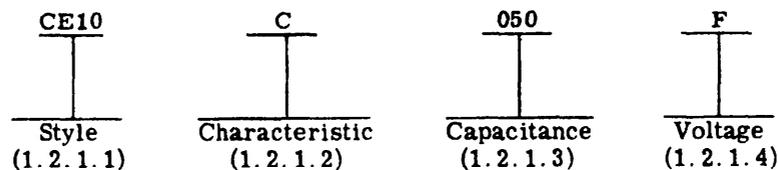

1.2.1.1 Style. The style is identified by the two-letter symbol "CE" followed by a two-digit number. The letters identify polarized, dry-electrolyte, aluminum, dc, fixed capacitors. The number identifies the shape and dimension of the capacitor.

1.2.1.2 Characteristic. The characteristic is identified by a single letter in accordance with table I.

TABLE I. Characteristic.

Symbol	Operating temperature range
C - - - - -	-40° to +85° C

1.2.1.3 Capacitance. The nominal capacitance value expressed in microfarads (uf) is identified by a three-digit number. When the nominal capacitance is 10 uf or greater, the first two digits represent significant figures and the last digit specifies the number of zeros to follow (example: 10 uf = 100; 150 uf = 151; 1500 uf = 152). When the nominal capacitance value is less than 10 uf (a whole number e.g. 9; a mixed number e.g. 4.7; or a fractional number e.g. 0.1 or 0.56), the letter "R" shall be used to indicate the decimal point and shall be placed where appropriate in the three digit number. When the letter "R" is used, the succeeding digit or digits become significant (example: 2 uf = 2R0; 4.7 uf = 4R7; 0.1 uf = 0R1; 0.56 uf = R56).

1.2.1.4 **Voltages.** The dc rated voltage, dc surge voltage, and capacitance tolerance are identified by a single letter in accordance with table II.

TABLE II. DC working voltage, dc surge voltage, and capacitance tolerance.

Symbol	DC rated voltage	DC surge voltage	Capacitance tolerance	Symbol	DC rated voltage	DC surge voltage	Capacitance tolerance
	volts	volts	percent		volts	volts	percent
J - - -	5	7	-10, +75	K - - -	200	250	-10, +50
K - - -	10	15	-10, +75	M - - -	250	300	-10, +50
L - - -	15	20	-10, +75	N - - -	300	350	-10, +50
M - - -	25	40	-10, +75	P - - -	350	400	-10, +50
N - - -	50	75	-10, +75	Q - - -	400	450	-10, +50
O - - -	100	150	-10, +75	R - - -	450	500	-10, +50
P - - -	150	200	-10, +75				

1.2.2 **Family.** Capacitors covered by this specification are classified by families according to their means of mounting, as specified in table III (see 3.1).

TABLE III. Families.

Family	Means of mounting	Styles
1	Axial wire-lead capacitors mounted by a tangential bracket or wrap-around bands.	CE10, CE11, CE12, and CE13
2	Universal-mounting capacitors mounted by a mounting ring.	CE31, CE32, CE33, CE34, CE35, and CE36
3	Stud-mounting capacitors mounted by a nut screwed on the threaded portion at the terminal end of the capacitor.	CE41, CE42, CE44, and CE45
4	Plug-in capacitors mounted by plugging the terminals into a standard, medium octal socket with a 0.687 ±0.007-inch-diameter pin circle and secured by suitable clamps.	CE51, CE52, CE53, CE56, CE57, and CE58
5	Bathtub capacitors mounted by mounting lugs.	CE63, and CE64
6	Tapped-terminal capacitors (screw insert for bus-bar connection), mounted by a wraparound, footed-type bracket.	CE70 and CE71

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

- MIL-C-39028 - Capacitors, Packaging of, General Specification for.
- MIL-C-45662 - Calibration System Requirements.

(See supplement 1 for list of applicable specification sheets.)

STANDARDS

FEDERAL

- Fed. Test Method Std. No. 151 - Metals; Test Methods.

MILITARY

- MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
- MIL-STD-129 - Marking for Shipment and Storage.
- MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.
- MIL-STD-456 - Electronic Parts, Date and Source Coding for.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS

- Handbook H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

3. REQUIREMENTS

3.1 Specification sheets. The individual part requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between any requirements of this specification and the specification sheet, the latter shall govern (see 6.1).

3.2 Qualification. Capacitors furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for the opening of the bids (see 4.4 and 6.2).

3.3 Material. The material shall be as specified herein. However, when a definite material is not specified, a material shall be used which will enable the capacitors to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the finished product.

3.3.1 Aluminum foil. Foil used in the construction of the anode shall have a minimum aluminum content of 99.95 percent, determined by the difference between 100.000 percent and the sum of all other metallic elements present in the amounts of 0.001 percent or more, each expressed to the third decimal. If analysis of the aluminum foil is required, it shall be made in accordance with Fed. Test Method Std. No. 151.

2 Internal examination. There shall be no visible evidence of corrosion when capacitors are examined as specified in 4.6.1.1.

Design and construction. Capacitors shall be of the design, construction, and physical dimensions specified (see 3.1).

1 Case. Each capacitor shall be in a metallic case and shall be effectively sealed against entry of contaminants, and leakage or evaporation of the electrolyte. The element shall be designed so that there will be no injurious movement in the case.

1.1 Case insulation (when applicable). Case insulation shall not soften or creep at the operating temperature. The use of cardboard sleeves for insulating purposes shall not be required.

2 Terminals. The terminals shall be permanently secured internally or externally, as applicable. All external joints shall be soldered or welded. Axial wire or tab-type terminals shall be coated in such a manner as to insure their ability to meet the requirements of the solderability test (see 3.5 and 3.23.1).

2.1 Solder lugs and solder-lug terminals. Solder lugs and solder-lug terminals may be of any shape, provided dimensional limits are met, and shall be coated with solder having a tin content of 40 to 70 percent. Solder lugs on styles CE31 through CE45 may be secured by spinning.

3 Threaded parts. All threaded parts shall be in accordance with Handbook H28 (see 3.1). Threaded parts shall engage by at least three full threads.

Solderability (not applicable to plug-in capacitors and styles CE70 and CE71). When tested as specified in 4.6.2, the dipped surface of the leads shall be at least 95-percent covered with a smooth, solder coating. The remaining 5-percent of the lead surface shall show only small pits or rough spots; these shall not be concentrated in one area. Bare base metal and areas where the solder dip failed to cover the original coating are indication of poor solderability, and are cause for failure. In case of dispute, the percent of coverage with pinholes or rough spots shall be determined by actual measurement of these areas, as compared to the total area.

DC leakage. When measured as specified in 4.6.3, the dc leakage shall not exceed the value specified (see 3.1).

Capacitance. When measured as specified in 4.6.4, the capacitance value shall be within the tolerance specified (see table II).

Dissipation factor. When measured as specified in 4.6.5, the dissipation factor shall not exceed the value specified (see 3.1).

Terminal strength (not applicable to plug-in capacitors). When capacitors are tested as specified in 4.6.6, there shall be no loosening of the terminals nor permanent damage to the terminals, terminal weld, or terminal solder. Threaded or tapped-stud terminals shall exhibit no appreciable movement relative to the case, under the applied torque.

0 Shock, medium impact. When capacitors are tested as specified in 4.6.7, there shall be no intermittent contacts of 0.5 milliseconds (ms) or greater, nor shall there be any arcing, open-circuiting, or mechanical damage.

1 Vibration. When capacitors are tested as specified in 4.6.8, there shall be no intermittent contacts of 0.5 ms or greater, nor shall there be any open- or short-circuiting, mechanical damage, or leakage of the electrolyte.

2 Salt spray (corrosion). When capacitors are tested as specified in 4.6.9, there shall be no corrosion or other defects that will affect life or serviceability. There shall be no unwrapping or mechanical damage to insulating sleeves. Marking shall remain legible after the test.

3.13 Temperature cycling and immersion. When tested as specified in 4.6.10, capacitors shall meet the following requirements:

Dielectric withstanding voltage (see 4.6.11.2) insulating sleeves only - - - -	Shall withstand a potential of not less than 4,000 volts dc.
DC leakage - - - - -	Shall not exceed 150 percent of the initial requirement (see 3.6), when measured as specified in 4.6.3.
Capacitance - - - - -	Change not more than 5 percent from the initial value obtained when measured as specified in 4.6.4.
Dissipation factor - - - - -	As specified in 3.8.
Visual examination - - - - -	There shall be no harmful or extensive corrosion and at least 90 percent of any exposed metallic surface of the capacitor shall be protected by the finish. There shall be no more than 10 percent corrosion of the terminal hardware or mounting surface. There shall be no unwrapping of or mechanical damage to insulating sleeves. There shall be no leakage of the electrolyte or deformation of the case, and marking shall remain legible after the test.

3.14 Moisture resistance. When tested as specified in 4.6.11, capacitors shall meet the following requirements:

Dielectric withstanding voltage (see 4.6.11.2) insulating sleeves only - - - -	Shall withstand a potential of not less than 4,000 volts dc.
Insulation resistance: (insulating sleeves) - - - - -	Shall be not less than 100 megohms.
DC leakage - - - - -	Shall not exceed 150 percent of the initial requirement (see 3.6) when measured as specified in 4.6.3.
Capacitance - - - - -	Change not more than 5 percent from the initial value obtained when measured as specified in 4.6.4.
Dissipation factor - - - - -	As specified in 3.8.
Visual examination - - - - -	There shall be no harmful or extensive corrosion and at least 90 percent of any exposed metallic surface of the capacitor shall be protected by the finish. There shall be no more than 10 percent corrosion of the terminal hardware or mounting surface. There shall be no leakage of the electrolyte or deformation of the case, and marking shall remain legible after the test. Insulating sleeves shall not exhibit evidence of burning, charring, or arcing.

3.15 Impedance. When determined as specified in 4.6.12, the impedance shall not exceed the value specified (see 3.1).

6 Stability at low and high temperatures. When tested as specified in 4.6.13, capacitors shall meet the following requirements:

Step 1		
DC leakage	-----	As specified in 3.6.
Capacitance	-----	As specified in 3.7.
Dissipation factor	-----	As specified in 3.8.
Step 2		
Impedance	-----	As specified in 3.15.
Step 3		
DC leakage	-----	As specified in 3.6.
Capacitance	-----	Change not more than 5 percent from the initial 25° C value (step 1).
Dissipation factor	-----	As specified in 3.8.
Step 4		
DC leakage	-----	Shall not exceed 10 times the initial 25° C value (step 1) or shall meet the initial 25° C requirement, whichever is greater.
Capacitance	-----	Shall not increase more than 20 percent from the initial 25° C value (step 1).
Dissipation factor	-----	As specified in 3.8.
Step 5		
DC leakage	-----	As specified in 3.6.
Capacitance	-----	Change not more than 5 percent from the initial 25° C value (step 1).
Dissipation factor	-----	As specified in 3.8.

7 Surge voltage. When capacitors are tested as specified in 4.6.14, there shall be no break- or other permanent injury. Terminals and seals shall remain intact. There shall be no evi- of leakage of the electrolyte when the capacitor is held with its terminals downward during st. The capacitors shall meet the following requirements:

DC leakage	-----	As specified in 3.6.
Capacitance	-----	Change not more than 6 percent from the initial value obtained when measured as specified in 4.6.4, unless otherwise specified (see 3.1).
Dissipation factor	-----	As specified in 3.8.
Visual examination	-----	There shall be no mechanical damage, leakage of the electrolyte, or deformation of the case.

8 Vent (applicable only to styles CE70 and CE71). When capacitors are tested as specified .15, the vent shall operate, and there shall be no explosive expelling of the contents. Dis- n shall occur only at the vent; the case or end seal shall not otherwise rupture (see 3.1 and t.

3.19 Life. When tested as specified in 4.6.16, capacitors shall meet the following requirements:

DC leakage - - - - -	As specified in 3.6.
Capacitance - - - - -	Shall be within the following percentages of the initial value obtained when measured as specified in 4.6.4. (a) -20 percent, +15 percent for capacitors with dc rated voltage of 100 volts or less. (b) ±15 percent for capacitors with dc rated voltage above 100 volts.
Dissipation factor - - - - -	Shall not exceed 150 percent of the initial measured value or shall meet the initial requirement, whichever is greater (see 3.8).
Visual examination - - - - -	There shall be no mechanical damage, leakage of the electrolyte, or deformation of the case.
Internal examination - - - - -	As specified in 3.3.2.

3.20 Barometric pressure. When capacitors are tested as specified in 4.6.17, there shall be no flashover, breakdown, deformation of the case, or leakage of the electrolyte.

3.21 Shelf life. When tested as specified in 4.6.18, capacitors shall meet the following requirements:

Build factor - - - - -	Shall not exceed 4.0 when determined as specified in 4.6.18.1.
Shelf factor - - - - -	Shall not exceed 3.0 when determined as specified in 4.6.18.1.
DC leakage - - - - -	Shall not exceed 150 percent of the initial requirement (see 3.6) when measured as specified in 4.6.3.
Capacitance - - - - -	Change not more than 6 percent from the initial value obtained when measured as specified in 4.6.4.
Dissipation factor - - - - -	Shall not exceed 175 percent of the initial requirement (see 3.8).
Visual examination - - - - -	There shall be no leakage of the electrolyte or deformation of the case.
Internal examination - - - - -	As specified in 3.3.2.

3.22 Marking. Capacitors shall be marked with the type designation, manufacturer's name or code symbol, capacitance in uf, dc rated voltage, positive terminals (see 3.22.1) and date of manufacture. The date and source coding shall be in accordance with MIL-STD-456.

3.22.1 Polarity. Polarity shall be indicated by a plus (+) symbol near the positive terminal except for styles CE10, CE11, CE12 and CE13 which shall have the polarity indicated by a series of plus (+) symbols completely surrounding the perimeter of positive end of the tubular case.

3.23 Workmanship. Capacitors shall be processed in such a manner as to be uniform in quality and shall be free from pits, corrosion, cracks, rough edges, and other defects that will affect life, serviceability, or appearance.

3.23.1 Soldering. Flux for soldering shall be rosin, rosin and alcohol, or rosin and turpentine. No acid or acid salts shall be used in preparation for or during soldering. All excess flux and solder shall be removed. Electrical connections shall be mechanically secured before soldering, where possible, and electrically continuous after soldering.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Test equipment and inspection facilities. The supplier shall establish and maintain a calibration system in accordance with MIL-C-45662.

4.2 Classification of inspection. The examination and testing of capacitors shall be classified as follows:

- (a) Qualification inspection (see 4.4).
- (b) Quality conformance inspection (see 4.5):
 - 1. Inspection of product for delivery (see 4.5.1).
 - 2. Inspection of preparation for delivery (see 4.5.3).

4.3 Inspection conditions and methods.

4.3.1 Conditions. Unless otherwise specified herein, all inspection shall be made at or referred to $25^{\circ} \pm 3^{\circ} \text{C}$, and at room ambient relative humidity and pressure. Unless otherwise specified, when tests are made at other than 25°C , the tolerance shall be $\pm 3^{\circ}$. At temperatures higher than 35°C , adequate circulation of air shall be provided to maintain the required temperature within the specified tolerance.

4.3.2 Methods.

4.3.2.1 AC measurements. Alternating-current (ac) measurements shall be made at the frequency specified. The magnitude of the ac voltage shall be limited to 1.0 volt root mean square (rms). The dc polarizing voltage, if applied, shall be greater than the peak ac voltage; the sum of the peak ac and polarizing voltage shall not exceed the dc rated voltage (see 3.1).

4.3.2.2 Reference measurements. When requirements are based on comparative measurements made before and after conditioning, the reference measurement shall be considered the last measurement made at 25°C prior to the conditioning. The reference measurements shall have been made within 30 days prior to the beginning of conditioning.

4.4 Qualification inspection. Qualification inspection shall be performed at a laboratory acceptable to the Government (see 6.2).

4.4.1 Sample. The number of sample units comprising a sample of capacitors to be submitted for qualification inspection shall be as specified in the appendix to this specification. The sample shall be taken from a production run and shall be produced with equipment and procedures normally used in production.

4.4.2 Test routine. Sample units shall be subjected to the qualification inspection specified in table IV, in the order shown. Two sample units shall be subjected to the visual and mechanical examination (internal). The remaining sample units shall be subjected to the subsequent inspection of group I. The sample units shall then be divided as specified in table IV for groups II to VI, inclusive. The sample units shall then be subjected to the inspection for their particular group.

4.4.3 Defectives. Defectives in excess of those allowed in table IV shall be cause for refusal to grant qualification approval.

TABLE IV. Qualification inspection.

Examination or test	Requirement paragraph	Method paragraph	Number of sample units to be inspected	Number of defectives allowed <u>1/</u>
<u>Group I</u>				
Visual and mechanical examination (internal) - - - - -	---	4.6.1 and 4.6.1.1	} 2	} 0
Material, design, construction, and workmanship - - - - -	3.1, 3.3 to 3.4.3 incl, 3.23, and 3.23.1			
Solderability (not applicable to plug-in capacitors and styles CE70 and CE71) - - - - -	3.5	4.6.2	6	0
Visual and mechanical examination (external) <u>2/</u> - - - - -	---	4.6.1	} 43 <u>4/</u> 31 <u>4/</u>	} 1
Physical dimensions, marking, <u>3/</u> and workmanship - - - - -	3.1, 3.4 to 3.4.3 incl, and 3.22 to 3.23.1 incl			
DC leakage <u>2/</u> - - - - -	3.6	4.6.3		
Capacitance <u>2/</u> - - - - -	3.7	4.6.4		
Dissipation factor <u>2/</u> - - - - -	3.8	4.6.5		
Terminal strength (not applicable to plug-in capacitors) <u>2/</u> - - - - -	3.9	4.6.6		
<u>Group II</u>				
Shock medium impact - - - - -	3.10	4.6.7	} 6	} 1
Vibration - - - - -	3.11	4.6.8 to 4.6.8.2 incl		
Salt spray (corrosion) - - - - -	3.12	4.6.9	} 6	} 2
Temperature cycling and immersion-	3.13	4.6.10 to 4.6.10.2 incl		
<u>Group III</u>				
Moisture resistance - - - - -	3.14	4.6.11	6	1
<u>Group IV</u>				
Stability at low and high temperatures <u>2/</u> - - - - -	3.16	4.6.13	} 6	} 1
Surge voltage - - - - -	3.17	4.6.14		
Vent (applicable only to styles CE70 and CE71) - - - - -	3.18	4.6.15		
<u>Group V</u>				
Life - - - - -	3.19	4.6.16	18	1
<u>Group VI</u>				
Barometric pressure - - - - -	3.20	4.6.17	} 6	} 1
Shelf life - - - - -	3.21	4.6.18 and 4.6.18.1		

1/ A sample unit having one or more defects shall be considered as a single defective.

2/ Nondestructive tests.

3/ Marking shall be considered as a defect only if it becomes illegible as a result of any of the inspection.

4/ One additional sample unit is included in each sample of 43 (or 31, as applicable) sample units to permit substitution for the allowable defective in group I.

4.4.4 Retention of qualification. In order to retain qualification, the supplier shall forward via the Government inspector, at 6-month intervals, to the activity responsible for qualification, a summary of the results of groups A and B tests indicating as a minimum the number of lots which passed and the number which failed, and a summary of the results of group C tests, including the number and type of any part failures. The summary shall include those tests performed during that 6-month period. If the summary of the test results indicates nonconformance with specification requirements, action will be taken to remove the failing product from the qualified products list. Failure to submit the summary will result in loss of qualification for that product. In addition to the periodic submission of inspection data, the supplier shall immediately notify the qualifying activity at any time during the 6-month period that the inspection data indicates failure of the qualified product to meet the requirements of this specification.

4.5 Quality conformance inspection.

4.5.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A, B, and C.

4.5.1.1 Inspection lot. An inspection lot, as far as practicable, shall be as specified in MIL-STD-105, and shall consist of all capacitors of the same family (see table XII). The sample selected shall be distributed proportionally among the various voltages and capacitance values within the family.

4.5.1.2 Group A inspection. Group A inspection shall consist of the examination and tests specified in table V, and shall be made on the same set of sample units, in the order shown.

4.5.1.2.1 Sampling plan. Statistical sampling and inspection shall be in accordance with MIL-STD-105 for general inspection level II. The acceptable quality levels (AQL) shall be as specified in table V. Major and minor defects shall be as defined in MIL-STD-105.

TABLE V. Group A inspection.

Examination or test	Requirement paragraph	Method paragraph	AQL (percent defective)	
			Major	Minor
Visual and mechanical examination:	---	4.6.1	}	}
Material - - - - -	3.3 and 3.3.1	---		
Physical dimensions - - - - -	3.4	---		
Design and construction (other than physical dimensions) - - - -	3.4 to 3.4.3 incl	---	}	}
Marking ^{1/} - - - - -	3.22 to 3.22.1 incl	---		
Workmanship - - - - -	3.23 and 3.23.1	---	}	}
DC leakage - - - - -	3.6	4.6.3		
Capacitance - - - - -	3.7	4.6.4		
Dissipation factor - - - - -	3.8	4.6.5		

^{1/} Marking defects are based on visual examination only and shall be charged only for illegible, incomplete, or incorrect marking. Any subsequent electrical defects shall not be used as a basis for determining marking defects.

4.5.1.2.2 Rejected lots. If an inspection lot is rejected, the supplier may withdraw the lot, rework it to correct the defects, or screen out the defective units, as applicable, and reinspect. Such lots shall be separate from new lots, and shall be clearly identified as reinspected lots. Rejected lots shall be inspected using tightened inspection.

4.5.1.3 Group B inspection. Group B inspection shall consist of the tests specified in table VI, in the order shown, and shall be made on sample units which have been subjected to and have passed the group A inspection.

4.5.1.3.1 Sampling plan. The sampling plan shall be in accordance with MIL-STD-105 for special inspection level S4. The AQL shall be 6.5 percent defective.

TABLE VI. Group B inspection.

Test	Requirement paragraph	Method paragraph
Stability at low and high temperatures ^{1/} - - - - -	3.16	4.6.13
Surge voltage - - - - -	3.17	4.6.14
Vent (applicable only to styles CE70 and CE71) - - -	3.18	4.6.15

^{1/} Nondestructive test.

4.5.1.3.2 Disposition of sample units. Sample units which have been subjected to the surge-voltage or the vent test shall not be delivered on the contract or order.

4.5.1.3.3 Stability-test failure. When an inspection lot is rejected due to excessive failures during the stability test, the lot may be screened 100 percent for stability to permit shipping the lot.

4.5.2 Periodic inspection.

4.5.2.1 Group C inspection. Group C inspection shall consist of the tests specified in table VII, in the order shown. Group C inspection shall be performed on sample units selected from inspection lots which have passed the groups A and B inspection. Shipment shall not be held up pending results of this inspection.

TABLE VII. Group C inspection.

Test	Requirement paragraph	Method paragraph	Number of samples to be inspected	Number of defectives allowed
<u>Every month</u>				
<u>Subgroup 1</u>				
Solderability (not applicable to plug-in capacitors and styles CE70 and CE71) - - - -	3.5	4.6.2	3	0
<u>Subgroup 2</u>				
Shock, medium impact - - - - -	3.10	4.6.7	} 3	0
Vibration - - - - -	3.11	4.6.8		
Salt spray (corrosion) - - - - -	3.12	4.6.9		
Temperature cycling and immersion - - - - -	3.13	4.6.10		
<u>Subgroup 3</u>				
Terminal strength (not applicable to plug-in capacitors) - - - - -	3.9	4.6.6	} 3	0
Moisture resistance - - - - -	3.14	4.6.11		
<u>Subgroup 4</u>				
Barometric pressure - - - - -	3.20	4.6.17	} 3	0
Shelf life - - - - -	3.21	4.6.18		
<u>Every 3 months</u>				
<u>Subgroup 5</u>				
Life - - - - -	3.19	4.6.16	3	0

3.2.1.1 Sampling plan. Three sample units shall be selected for each subgroup of table VII the first lot, and thereafter, once each month or every 3 months, as applicable, from capacitors currently in production. If one or more of the sample units fail to pass group C inspection, the sample shall be considered to have failed.

3.2.1.2 Disposition of sample units. Sample units which have been subjected to group C inspection shall not be delivered on the contract or order.

3.2.1.3 Noncompliance. If a sample fails to pass group C inspection, the supplier shall take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which were manufactured under essentially the same conditions, with essentially the same materials, processes, etc., and which are considered subject to the same inspection. Acceptance of the product shall be discontinued until corrective action, acceptable to the Government, has been taken. After the corrective action has been taken, group C inspection shall be repeated on additional sample units (all inspection, or the inspection which the original sample failed, at the option of the Government). Groups A and B inspection may be reinstated; however, acceptance shall be withheld until the group C reinspection has shown that the corrective action is successful. In the event of failure after reinspection, information concerning the failure and corrective action taken shall be furnished to the contracting officer, and to the qualifying activity.

3.3 Inspection of preparation for delivery. Sample packages or packs and the inspection of preservation, packaging, packing, and marking for shipment and storage shall be in accordance with the requirements of section 5 or the documents specified herein.

3.4 Methods of examination and test.

3.4.1 Visual and mechanical examination. Capacitors shall be examined to verify that the materials, design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements (see 3.1, 3.3 to 3.4.3 inclusive, and 3.22 to 3.23.1 inclusive).

3.4.1.1 Internal examination. Capacitors shall be opened and the foils and separator shall be examined for a visual examination of the internal construction. The entire interior, including foils, contact area of tab to foil, shall be examined for corrosion (see 3.3.2).

3.4.2 Solderability (see 3.5) (not applicable to plug-in capacitors and styles CE70 and CE71). Capacitors shall be tested in accordance with method 208 of MIL-STD-202. The following details shall apply:

- (a) Number of terminations of each part to be tested - 2.
- (b) Depth of immersion in flux and solder - Leads shall be immersed to within 1/8 inch of the capacitor body, or to within 1/8 inch of the soldered or welded joint, as applicable (see 3.1).

3.4.3 DC leakage (see 3.6). DC leakage shall be measured using the dc rated voltage (see 3.1), and across the terminals of the capacitor for a period of 5 minutes with a suitable current-limiting resistor (see 6.10), and dc milliammeter or microammeter connected in series. The probability of voltage shall occur within 60 seconds. The dc leakage shall be measured at the end of the minute period. Measurement accuracy shall be within ± 5 percent.

3.4.4 Capacitance (see 3.7). Capacitance shall be measured in accordance with method 305 of MIL-STD-202. The following details shall apply:

- (a) Test frequency - 120 ± 5 Hertz (Hz).
- (b) Limit of accuracy - Within ± 2 percent.
- (c) Magnitude of polarizing voltage - The application and magnitude of a dc polarizing voltage is optional (see 4.3.2), if no substantial difference is noted between capacitance measurements with and without polarizing voltage applied. The reading with a polarizing voltage applied shall govern in case of conflict.

4.6.5 Dissipation factor (see 3.8). Dissipation factor shall be determined by a capacitance bridge at a frequency of 120 ± 5 Hz. Measurement accuracy shall be within ± 2 percent. The application and magnitude of a dc polarizing voltage is optional (see 4.3.2), if no substantial difference is noted between dissipation factor measurements with and without polarizing voltage applied. The reading with a polarizing voltage applied shall govern in case of conflict. Equivalent series resistance may be measured and converted to dissipation factor.

4.6.6 Terminal strength (see 3.9). Terminals shall be tested in accordance with method 211 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Test condition - A, applicable to all except plug-in terminals.
 1. Applied force - As specified in table VIII.
 2. Direction and duration of applied force, other than axial-wire leads - The pull may be applied in any direction, including the weakest, at the point where the terminal is normally connected in an actual circuit. The pull shall be increased gradually to the specified magnitude and held at that value for at least 10 seconds.
 3. Direction and duration of applied force, axial-wire leads - The contact shall be made $5/8$ inch from the insulator (case) and the pull shall be applied axially. The pull shall be increased gradually to the specified magnitude and held at that value for at least 30 seconds.
- (b) Test condition - B, applicable to solder lugs.
 1. Number of bending operations - Three.
- (c) Test condition - D, applicable to axial-wire leads.
- (d) Test condition - E, applicable to solder-lug and screw-insert terminals.
 1. Applied force - As specified in table VIII.
- (e) Examination after test - Terminals shall be examined for loosening or permanent damage, and the terminal weld or solder joint shall be examined for perceptible movement relative to the case (see 3.9).

TABLE VIII. Terminal strength.

Type of terminal	Pull Pounds	Torque Pound-inches
Axial-wire lead - - - - -	5	---
Solder lug - - - - -	5	1
Screw-insert - - - - -	10	10

4.6.7 Shock, medium impact (see 3.10). Capacitors shall be tested in accordance with method 205 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Special mounting means - Rigidly mounted by the body; axial-wire-lead capacitors shall be fastened to rigidly supported terminals.
- (b) Test condition - C, except that for styles CE70 and CE71, test condition B shall apply.
- (c) Measurements during and after shock - During the test, an electrical measurement shall be made to determine intermittent contacts or arcing or open- or short-circuiting. Detecting equipment shall be sufficiently sensitive to detect an interruption with a duration of 0.5 ms or greater.
- (d) Examination after test - Capacitors shall be visually examined for mechanical damage.

4.6.8 Vibration (see 3.11).

4.6.8.1 Low frequency (applicable only to styles CE63, CE64, CE70, and CE71). Capacitors shall be tested in accordance with method 201 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Tests and measurements prior to vibration - Not applicable.
- (b) Method of mounting - Securely fastened by normal mounting means (see table III and 3.1).
- (c) Duration of vibration - 1-1/2 hours.
- (d) Direction of motion - 45 minutes in each of two mutually perpendicular directions, one parallel and the other perpendicular to the cylindrical major axis.
- (e) Measurements during vibration - During the last 3 minutes of vibration in each direction, an electrical measurement shall be made to determine intermittent contacts or open- or short-circuiting. Detecting equipment shall be sufficiently sensitive to detect any interruption with a duration of 0.5 ms or greater.
- (f) Examinations after test - Capacitors shall be visually examined for mechanical damage and leakage of the electrolyte.

4.6.8.2 High frequency (applicable to all styles except CE63, CE64, CE70, and CE71). Capacitors shall be tested in accordance with method 204 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Mounting of specimens - Body of the capacitor shall be rigidly mounted to the vibration-test apparatus.
- (b) Test condition - B, except that the peak acceleration shall be 10 gravity units.
- (c) Duration and direction of motion - 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.
- (d) Measurements - During the last 30 minutes in each direction, an electrical measurement shall be made to determine intermittent contacts or open- or short-circuiting. Detecting equipment shall be sufficiently sensitive to detect any interruption with a duration of 0.5 ms or greater.
- (e) Examinations after test - Capacitors shall be visually examined for mechanical damage and leakage of the electrolyte.

4.6.9 Salt spray (corrosion) (see 3.12). Capacitors shall be tested in accordance with method 101, test condition B, of MIL-STD-202. After this test, capacitors shall be visually examined for corrosion and other defects that will affect life or serviceability, for unwrapping of and mechanical damage to insulation sleeves, and obliteration of marking.

4.6.10 Temperature cycling and immersion (see 3.13).

4.6.10.1 Temperature cycling. Capacitors shall be tested in accordance with method 102 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Conditioning prior to first cycle - 15 minutes at room ambient temperature.
- (b) Test condition - D, except that in step 1, capacitors shall be tested at -40° C.
- (c) Measurements before and after cycling - Not applicable.

4.6.10.2 Immersion. Following temperature cycling, capacitors shall be tested in accordance with method 104 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Test condition - C, except that the duration of each immersion shall be 15 minutes. Change from one solution to the other shall be made in not more than 3 seconds.
- (b) Time after final cycle allowed for measurements - Measurements shall be made within 1/2 to 4 hours after capacitors are removed from the immersion tank.
- (c) Measurements after final cycle - DC leakage, capacitance, and dissipation factor shall be measured at room ambient temperature and as specified in 4.6.3, 4.6.4, and 4.6.5, respectively.
- (d) Examinations after test - Capacitors shall be visually examined for corrosion, unwrapping of and mechanical damage to insulating sleeves, leakage of the electrolyte, deformation of the case, and obliteration of marking.

4.6.11 Moisture resistance (see 3.14). Capacitors shall be tested in accordance with method 106 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Mounting - Except during examination and measurements, rigidly mounted by normal mounting means (see 3.1).
- (b) Conditioning prior to first cycle - Not applicable.
- (c) Initial measurements - Not applicable.
- (d) Polarization and load - During step 7 of the ninth cycle, the dc rated voltage (see 3.1), shall be applied to the capacitor for 30 minutes. If the subcycle is performed during the ninth cycle, the voltage shall be applied after step 7b.
- (e) Final measurements:
 1. For capacitors with insulating sleeves - Within 10 minutes after removal from the controlled atmosphere, the insulation resistance shall be measured as specified in 4.6.11.1. Within 5 minutes after measurement of insulation resistance, capacitors shall be subjected to dielectric withstanding voltage as specified in 4.6.11.2.
 2. For all capacitors - After the final cycle and within 2 to 6 hours after removal of capacitors from the humidity chamber, dc leakage, capacitance, and dissipation factor shall be measured as specified in 4.6.3, 4.6.4, and 4.6.5, respectively.
- (f) Examinations after test - Capacitors shall be visually examined for corrosion, leakage of the electrolyte, deformation of the case, and obliteration of marking.

4.6.11.1 Insulation resistance (insulating sleeves). Capacitor insulating sleeves shall be tested in accordance with method 302 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Test condition - B, 500 ±10 percent volts dc.
- (b) Points of measurement - Between a strip of metallic foil 1/2 ±1/16 inch-wide and the capacitor case. The foil shall be wrapped smoothly for approximately two complete turns around the capacitor sleeve and shall be held in place by at least two turns of AWG size 20 bare copper wire.
- (c) Electrification time - Not more than 1 minute.

4.6.11.2 Dielectric withstanding voltage (insulating sleeves). Capacitor insulating sleeves shall be tested in accordance with method 301 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Magnitude and nature of test voltage - 4,000 volts DC; the test potential shall be increased from 0 to 4,000 volts at a rate of not more than 500 volts per second.
- (b) Points of application - Between the strip of metallic foil and the capacitor case (see 4.6.11.1(b)).
- (c) Examination after test - The foil wrap shall be removed and insulating sleeves shall be examined for burning, charring, and arcing.

4.6.12 Impedance (see 3.15). Impedance shall be determined at $-40^{\circ} +_{-3}^{0}$ C at a frequency of $120 +_{-5}^{10}$ Hz. The capacitors shall be brought to thermal stability at the test temperature. Thermal stability will have been reached when no further change in impedance is observed between two successive measurements taken at 15-minute intervals. Measurement accuracy shall be within ± 5 per cent (see 4.3.2).

4.6.13 Stability at low and high temperatures (see 3.16). The measurements specified in table IX shall be made in the order shown. The capacitors shall be brought to thermal stability. Thermal stability will have been reached when no further change in capacitance is observed between two successive measurements taken at 15-minute intervals.

TABLE IX. Temperatures and measurements for stability test at low and high temperatures.

Step	Temperature	Test	Method paragraph
1	$25^{\circ} \pm 3^{\circ}$ C	DC leakage Capacitance Dissipation factor	4.6.3 4.6.4 4.6.5
2	$-40^{\circ} -_{+0}^{-3}$ C	Impedance	4.6.12
3	$25^{\circ} \pm 3^{\circ}$ C	DC leakage Capacitance Dissipation factor	4.6.3 4.6.4 4.6.5
4	$85^{\circ} +_{-0}^{+3}$ C	DC leakage ^{1/} Capacitance Dissipation factor	4.6.3 4.6.4 4.6.5
5	$25^{\circ} \pm 3^{\circ}$ C	DC leakage Capacitance Dissipation factor	4.6.3 4.6.4 4.6.5

^{1/} DC leakage measurement not required for styles CE63 and CE64.

4.6.14 Surge voltage (see 3.17). Capacitors shall be subjected to 1 000 cycles of the dc surge voltage specified in table II. The ambient temperature during cycling shall be the applicable maximum temperature (see 3.1). Each cycle shall consist of a 30-second surge-voltage application followed by a 5-1/2 minute discharge period. Voltage application shall be made through a resistor in series with the capacitor and the voltage source. For capacitors whose nominal capacitance is below 2,500 uf, the resistor shall have a value of 1,000 ±100 ohms. For capacitors whose nominal capacitance is 2,500 uf and above, the value of the resistor shall be determined from the following formula:

$$R = \frac{2.5 \times 10^6}{C}$$

Where:

- R = resistance in ohms.
- C = capacitance in uf.

Each surge -voltage cycle shall be performed in such a manner that the capacitor is discharged through the applicable resistor at the end of the 30-second application. After the test, dc leakage, capacitance, and dissipation factor shall be measured as specified in 4.6.3, 4.6.4, and 4.6.5, respectively. Capacitors shall then be visually examined for mechanical damage, leakage of the electrolyte, and deformation of the case.

4.6.15 Vent (applicable only to styles CE70 and CE71) (see 3.18). Capacitors shall be subjected to an ac test current in accordance with table X. The vent shall operate within 5 minutes. If the capacitor opens or short-circuits and the vent has not operated, additional capacitors shall be selected and subjected to this test.

TABLE X. Venting.

Nominal capacitance	Test current (rms)
<u>uf</u>	<u>Amperes, inclusive</u>
Up to 3,000 inclusive - - - - -	10 to 100
3,001 to 20,000 inclusive - - - - -	85 to 150
Over 20,000 - - - - -	100 to 175

4.6.16 Life (see 3.19). Capacitors shall be tested in accordance with method 108 of MIL-STD-202. The following details and exceptions shall apply:

- (a) Distance of temperature measurements from specimens - Not applicable.
- (b) Method of mounting - Normal mounting means.
- (c) Test temperature and tolerance - +85° +3°
-0° C.
- (d) Operating conditions - The dc rated voltage (see 3.1), shall be applied continuously to the capacitors through a current-limiting resistor.
- (e) Test condition - F (2,000 hours) ±12 hours.
- (f) Measurements after exposure - Capacitors shall be returned to the inspection conditions specified in 4.3.1. DC leakage, capacitance, and dissipation factor shall then be measured as specified in 4.6.3, 4.6.4, and 4.6.5. Capacitors shall then be visually examined for mechanical damage, leakage of the electrolyte, and deformation of the case. Two capacitors shall then be subjected to the internal examination specified in 4.6.1.1 (see 3.3.2 and 3.19).

3.17 Barometric pressure (see 3.20). Capacitors shall be tested in accordance with method MIL-STD-202. The following details and exceptions shall apply:

- (a) Method of mounting - Except during examination and measurement, rigidly mounted by normal mounting means (see table III and 3.1).
- (b) Test condition and period of time at reduced pressure prior to application of potential - Capacitors shall be placed in an atmospheric pressure of 0.82 inch of mercury for a period of 5 minutes.
- (c) Test during subjection to reduced pressure - At the end of the 5-minute conditioning period, with the capacitors still at reduced pressure, the dc rated voltage (see 3.1), shall be applied for 1 minute between the terminals of each capacitor.
- (d) Examinations after subjection to reduced pressure - Capacitors shall be examined for flashover, breakdown, deformation of the case, and leakage of the case, and leakage of the electrolyte.

3.18 Shelf life (see 3.21). The build factor of the capacitors shall be determined and calculated as specified in 4.6.18.1. The capacitors shall then be stored for 100 ±8 hours, in a forced-dry oven at a temperature of 85° ±3° C without any application of voltage. After the storage period, capacitors shall be removed from the chamber and returned to and stabilized at room ambient conditions. The shelf factor shall then be determined as specified in 4.6.18.1. DC leakage, capacitance, and dissipation factor shall then be measured, in that order, as specified in 4.6.3, 4.6.4, 4.6.5, respectively, except that the electrification time for DC leakage measurements before this test shall be 10 minutes. Capacitors shall then be examined for leakage of the electrolyte and deformation of the case. Two capacitors shall then be subjected to the internal examination specified in 4.6.1.1 (see 3.3.2).

3.18.1 Build and shelf factors. Capacitors shall be charged to the dc rated voltage (see 3.1), by a constant current source. The time to charge shall be recorded to the nearest 0.1 second. The charging current shall be such that the charge time will not be less than 5.0 seconds and not greater than 50.0 seconds. The build factor shall be computed as follows:

$$\text{Build factor} = \frac{\text{Actual charge time}}{\text{Theoretical charge time}} = \frac{A}{T} = \frac{AI \times 10^3}{CV}$$

Where:

- A = actual charge time.
 - T = theoretical charge time.
 - I = charge current in milliamps.
 - C = measured capacitance in microfarads.
 - V = dc rated voltage (see 3.1).
- $$CV = g = IT$$
- $$T = \frac{CV}{I}$$

Shelf factor shall be computed as follows:

$$\text{Shelf factor} = \frac{\text{Actual charge time after storage}}{\text{Actual charge time before storage}}$$

PREPARATION FOR DELIVERY

1 Preparation. Capacitors shall be prepared for delivery in accordance with MIL-C-39028.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

- (a) Title, number, and date of this specification.
- (b) Title, number, and date of the applicable specification sheet, and the complete type designation (see 3.1).
- (c) Levels of preservation and packaging and packing, and applicable marking (see section 5).

6.1.1 Indirect shipments. The preservation, packaging, packing, and marking requirements specified in section 5 apply only to direct purchases by or direct shipment to the Government and are not intended to apply to contracts or orders between the supplier and prime contractor.

6.2 Qualification. With respect to products requiring qualification, awards will be made only for products which are at the time set for opening of bids, qualified for inclusion in the applicable qualified products list whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the qualified products list is Electronics Command; however, information pertaining to qualification of products may be obtained from the Defense Electronics Supply Center (DESC-E), 1507 Wilmington Pike, Dayton, Ohio 45401.

6.3 Reforming of dielectric film. Caution should be exercised in using capacitors which have had an idle shelf life of more than 4 years. Users should refer to MIL-STD-1131 "Storage Shelflife and Reforming Procedures for Aluminum Electrolytic Fixed Capacitors" for inspection and reforming procedures.

6.4 Working temperature range. In the selection or use of these capacitors, careful consideration should be given to the overall temperature requirements of the basic equipment, since many equipments must operate over a greater temperature range than that covered by this specification. Capacitors should be operated within their normal temperature range for satisfactory service and maximum life.

6.5 High temperature. In planning the location of the capacitors with respect to other component parts, careful consideration should be given to the proximity of the capacitors to transformers, electron tubes, and high-current resistors because of the usual temperature rise involved in these components. Continued operation at temperatures above the normal rating will cause a permanent decrease in capacitance and an increase in series resistance.

6.6 Low temperature. The performance of these capacitors at subzero temperatures is mainly affected by an increase in series resistance and by a decrease in capacitance. These changes do not persist with the return of normal temperature conditions. At -40°C these capacitors retain approximately 50 percent of the initial capacitance.

6.7 Circuit diagram. For all styles except CE10 to CE13, inclusive, the electrolyte cannot be insulated completely from the case. The circuit diagram (see 3.1), for these styles shows an indeterminate resistance, which may change with time, between the negative terminal and ground (case). To insure proper circuit operation, the case should be considered as being directly connected to the terminal. In applications where the negative terminal is not at ground potential, the capacitor should be insulated from the chassis by means of an insulating sleeve.

6.8 Polarity. These capacitors should be used only in dc circuits with polarity properly observed. If ac components are present, the sum of the peak ac voltage plus the applied dc voltage must not exceed the dc rated voltage (see 3.1). The peak ac value should also be less than the applied dc voltage, in order that polarity may be maintained even on negative peaks. Capacitors which have been subjected to voltage reversal should be discarded.

6.9 Storage. It is to be noted that these capacitors deform and become unusable when stored at high temperatures; however, they may be subjected, without permanent damage, to conditions in transit where the temperatures range from -55° to +85° C, and where the altitude is up to 80,000 feet.

6.10 Current-limiting resistor. It is recommended that the current-limiting resistor referenced in 4.6.2 have a resistance in ohms equal to or less than the dc rated voltage (see 3.1).

6.11 Insulated capacitors. Sleeved capacitors are recommended for use in those applications where the case is to be connected at a potential above or below ground potential. The use of un-insulated capacitors in such applications could present a shock hazard to personnel or possibly cause an accidental short circuit.

6.12 Ripple current. To avoid overheating and shortened life the maximum rms ripple current through the capacitor should not exceed the value determined. The formulas (see 3.1) for calculating the ripple current are based on operation at 120 Hz and 85° C. For other frequencies or temperatures the calculated value should be multiplied by the applicable factor from table XI.

TABLE XI. Ripple current multiplier.

Frequency	Multiplier				
	+85° C	+65° C	+55° C	+45° C	+40° C and below
60 Hz - - - - -	0.8	1.2	1.6	2.2	3.0
120 Hz - - - - -	1.0	1.5	2.0	2.8	3.0
Above 120 Hz - - - - -	1.1	1.7	2.2	3.0	3.0

6.13 Standard capacitor types. Equipment designers should refer to MIL-STD-198 "Capacitors, Selection and Use of", for standard capacitor types and selected values chosen from this specification. MIL-STD-198 provides a selection of standard capacitors for new equipment design.

6.14 Application data. Capacitor styles CE63 and CE64 are retained for replacement and maintenance purposes only. For new design use styles CE11 or CE13.

6.15 Supersession. Minor changes made in this revision, in order to incorporate decade capacitance values, standardize case dimensions, and standardize DF or impedance limits, will not require assignation of new stock numbers.

6.16 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:

Army - EL
Navy - EC
Air Force - 11

Preparing activity:

Army - EL
(Project 5910-0848)

Review activities:

Army - EL, MU, MI
Navy - EC, AS, OS
Air Force - 11, 17, 85
DSA - ES

User activities:

Army - ME, AT, AV
Navy - MC
Air Force - 19

APPENDIX

PROCEDURE FOR QUALIFICATION INSPECTION

10. SCOPE

10.1 This appendix details the procedure for submission of samples, with related data, for qualification inspection of capacitors covered by this specification. The procedure for extending qualification of the required sample to other capacitors covered by this specification is also outlined herein.

20. SUBMISSION

20.1 Sample.

20.1.1 Single-voltage submission. A sample consisting of 45 or 33 sample units of the highest capacitance value and the highest number of sections in each family and dc rated voltage for which qualification is sought shall be submitted.

20.1.2 Multiple-voltage submission. When qualification is sought for all voltages in single-section capacitors, a sample consisting of 45 or 33 sample units of the highest capacitance value for which qualification is sought shall be submitted in each style in each of the following voltages: 450, 400, 300, 150 (or 100), 50, 15, and 5 volts. If qualification is sought for two-section capacitors, the 450-, 400-, and 300-volt capacitors shall be submitted in the two-section styles of the same family.

20.1.3 Complete-family submission. When qualification is sought for a complete family, sample units shall be submitted in accordance with table XII.

20.1.4 Abbreviated submission. If the supplier wishes to submit sample units simultaneously for families 2 and 3, 2 and 4, or 2, 3, and 4, an abbreviated submission for these combinations of families will be acceptable, provided the supplier submits with the sample units a statement that the electrolyte and the roll assembly for a given capacitance and dc rated voltage do not differ among the families. The basis for an abbreviated submission is as follows:

- (a) A sample consisting of 45 sample units shall be submitted in each of the following voltages: 450, 400, 300, 150 (or 100), 50, and 15 volts. Each sample shall be in the same style, and in the highest capacitance value in that style. The 450- and 400-volt capacitors shall be from different families.
- (b) At least 1 sample from each family shall be submitted, with the further provision that the 450- and 400-volt capacitors shall be in the styles having the highest number of sections for their respective families.

20.2 Test data. When tests are to be performed at a Government laboratory, prior to submission, all sample units shall be subjected to all of the examinations and tests indicated as nondestructive in table V. Each submission shall be accompanied by the test data obtained from these examinations and tests. The performance of the destructive examinations and tests by the supplier on a duplicate set of sample units is encouraged, although not required. All test data shall be submitted in duplicate.

20.3 Certification of material. When submitting samples for qualification, the supplier shall submit certification, in duplicate, that the materials used in his components are in accordance with the applicable specification requirements.

TABLE XII. Complete-family submission.

Family and styles	Number of sample units to be submitted	Type designation
Family 1 (styles CE10, CE11, CE12, and CE13)	45 45 45 45 45 45 45	CE13C750R CE13C820Q CE13C131N CE11C100J CE11C330G CE11C151E CE11C271C
Family 2 (styles CE31, CE32, CE33, CE34, CE35, and CE36)	45 45 45 45 45 45	CE36C330R CE36C330Q CE36C680N CE34C471J CE34C152G CE34C682E
Family 3 (styles CE41, CE42, CE44, and CE45)	45 45 45 45 45 45	CE45C430R CE45C470Q CE45C101N CE44C471J CE44C222G CE44C682E
Family 4 (styles CE51, CE52, CE53, CE56, CE57, and CE58)	45 45 45 45 45 45	CE58C330R CE58C330Q CE58C680N CE56C471J CE56C222G CE56C682E
Family 5 (styles CE63 and CE64)	33 33 33 33 33 33	CE64C4R7R CE64C100N CE63C6R0Q CE63C200J CE63C500G CE63C101E
Family 6 (styles CE70 and CE71)	45 45 45 45 45 45 45	CE71C102R CE71C122Q CE71C222N CE70C472J CE70C223G CE70C823E CE70C154C

20.4 Description of items. The supplier shall submit a detailed description of the capacitors being submitted for inspection, including type of electrolyte, type of electrode, type of seal or gaskets (inner or outer, as applicable), case material and finish, type and thickness of separator material, and details of terminal assemblies.

30. EXTENT OF QUALIFICATION

30.1 General. Qualification of an insulated style shall be a basis for qualification of an uninsulated style as indicated in table XIII.

TABLE XIII. Extent of qualification.

Style submitted	Styles qualified
CE11 - - - - -	CE10 and CE11
CE13 - - - - -	CE12 and CE13
CE34 - - - - -	CE31 and CE34
CE35 - - - - -	CE32 and CE35
CE36 - - - - -	CE33 and CE36
CE44 - - - - -	CE41 and CE44
CE45 - - - - -	CE42 and CE45
CE56 - - - - -	CE51 and CE56
CE57 - - - - -	CE52 and CE57
CE58 - - - - -	CE53 and CE58
CE71 - - - - -	CE70 and CE71

30.2 Single-voltage submission. Qualification shall be restricted to total capacitance values and number of sections no higher than those of the submitted capacitors.

30.3 Multiple-voltage submission. Qualification of the types submitted shall be a basis for qualification of all voltages in the style or styles represented. Other qualifications in a style shall be as follows:

Qualification of	Shall be the basis for qualification of
5- and 15-volt capacitors - - - - -	10-volt capacitors
15- and 50-volt capacitors - - - - -	25-volt capacitors
150- (or 100-) and 300-volt capacitors - - - - -	100- (or 150-), 200-, and 250-volt capacitors
300- and 450-volt capacitors - - - - -	350- and 400-volt capacitors

If any of the types submitted fails, qualification of the remaining types shall be restricted to that permitted in 30.2.

30.4 Complete-family submission. Qualification of the types submitted shall be a basis for qualification of a complete family. If any of the types submitted fails, qualification of the remaining types shall be restricted to that permitted in 30.2 and 30.3.

30.5 Abbreviated submission. Qualification of the types submitted shall be a basis for qualification of the families represented. If any of the types submitted fails, qualification of the remaining types shall be restricted to that permitted in 30.2 and 30.4, inclusive.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (*DO NOT STAPLE*), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES


OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Electronics Command
Attn: AMSEL-RD-ZS-1
Fort Monmouth, NJ 07703

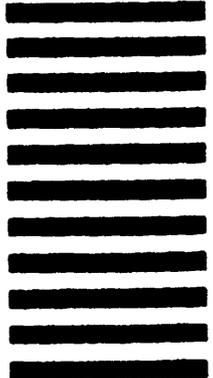

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER		2. DOCUMENT TITLE	
3a. NAME OF SUBMITTING ORGANIZATION		4. TYPE OF ORGANIZATION (Mark one)	
b. ADDRESS (Street, City, State, ZIP Code)		<input type="checkbox"/> VENDOR	
		<input type="checkbox"/> USER	
		<input type="checkbox"/> MANUFACTURER	
		<input type="checkbox"/> OTHER (Specify): _____	
5. PROBLEM AREAS			
a. Paragraph Number and Wording:			
b. Recommended Wording:			
c. Reason/Rationale for Recommendation:			
6. REMARKS			
7a. NAME OF SUBMITTER (Last, First, MI) - Optional		b. WORK TELEPHONE NUMBER (Include Area Code) - Optional	
c. MAILING ADDRESS (Street, City, State, ZIP Code) - Optional		8. DATE OF SUBMISSION (YYMMDD)	

DD FORM 1426
82 MAR

PREVIOUS EDITION IS OBSOLETE.