

INCH-POUND


MIL-C-85049/95  
8 October 1993

### MILITARY SPECIFICATION

#### CONNECTOR ACCESSORIES, ELECTRICAL, MOUNTING DEVICE FLANGE TYPE, 3/4 MOUNTING PERIMETER DEVICE, TYPE II (MEDIUM DUTY)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-85049.

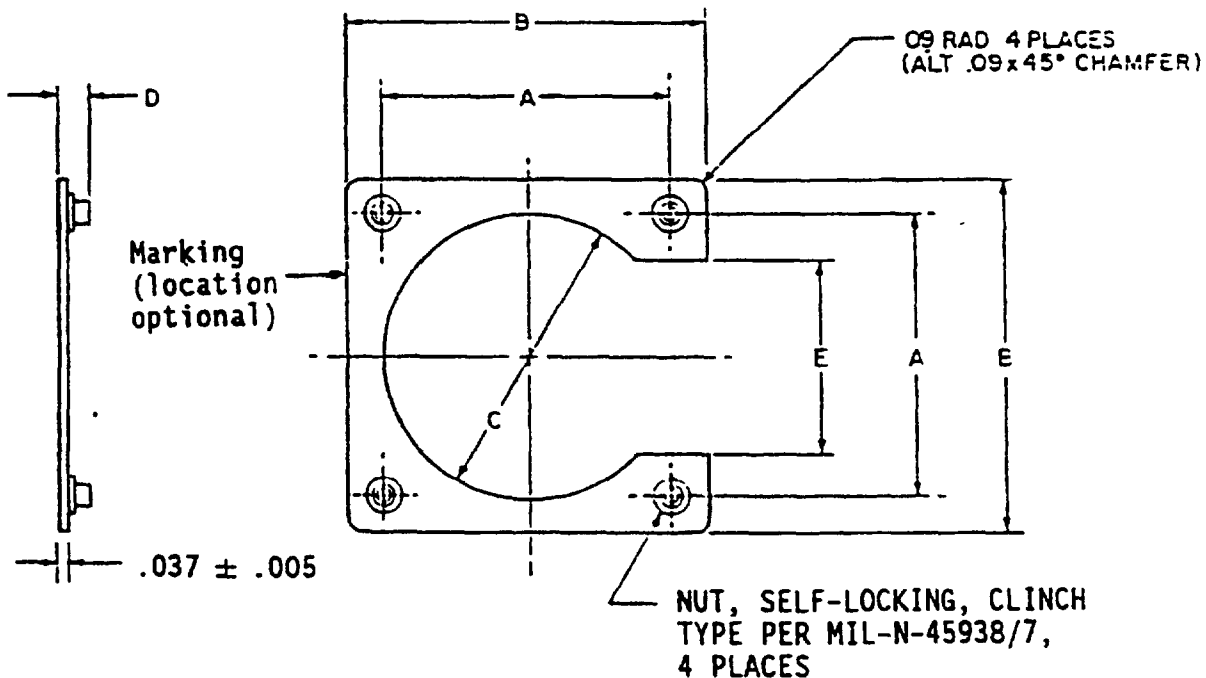

#### Notes:

1. Dimensions are inches.
2. Unless otherwise specified, tolerance is  $\pm .010$ .
3. Classes represent shell size variations (see Table I).
4. For mounting flange cross reference information see Table III.

Figure 1. Mounting flange, Type II

MIL-C-85049/95

Table I. Mounting flanges.

M85049/95-	CLASS	SHELL SIZE	THRD UNJC -3B	A ± .003 1/	B ± .015 1/	C + .015 - .000	D	E +.000 -.030 1/
3	A	3	4-40	.625	.925	.641	.106/ .166	.325
7	A	7	4-40	.719	1.019	.688	.106/ .166	.433
8	A	8	4-40	.594	.880	.570	.106/ .166	.308
10	A	10	4-40	.719	1.019	.720	.106/ .166	.433
	B		6-32	.812	1.187	.749	.123/ .183	
12	A	12	4-40	.812	1.104	.855	.106/ .166	.530
	B		6-32	.938	1.187	.938	.123/ .183	.526
14	A	14	4-40	.906	1.198	.984	.106/ .166	.624
	B		6-32	1.031	1.406	1.031	.123/ .183	.620
16	A	16	4-40	.969	1.280	1.094	.106/ .166	.687
	B		6-32	1.125	1.500	1.125	.123/ .183	.683
18	A	18	4-40	1.062	1.406	1.220	.106/ .166	.780
	B		6-32	1.203	1.578	1.234	.123/ .183	.776
19	A	19	4-40	.906	1.192	.953	.106/ .166	.620
20	A	20	4-40	1.156	1.535	1.345	.106/ .166	.874
	B		6-32	1.297	1.688	1.359	.123/ .183	.865
22	A	22	4-40	1.250	1.665	1.478	.106/ .166	.968
	B		6-32	1.375	1.738	1.483	.123/ .183	.907

MIL-C-85049/95

Table I. Mounting flanges - continued.

M85049/95-	CLASS	SHELL SIZE	THRD UNJC -3B	A ± .003 1/	B ± .015 1/	C +.015 -.000	D	E +.000 -.030 1/
24	A	24	4-40	1.500	1.891	1.560	.123/ .183	1.000
	B		6-32	1.375	1.785	1.595	.123/ .183	1.031
25	A	25	6-32	1.500	1.891	1.658	.123/ .183	1.125
27	A	27	4-40	.969	1.255	1.094	.106/ .155	.683
28	A	28	6-32	1.562	2.000	1.820	.123/ .183	1.125
32	A	32	6-32	1.750	2.312	2.062	.123/ .183	1.188
36	A	36	6-32	1.938	2.500	2.312	.123/ .183	1.375
37	A	37	4-40	1.187	1.500	1.281	.106/ .166	.874
61	A	61	4-40	1.437	1.812	1.594	.106/ .166	1.602

1/ Dimensions A, B and E shall be measured with the mounting flange in the restrained state.

Table II. Qualification.

Inspection	Requirement paragraph	Test paragraph
Examination of product	3.1, 3.3, 3.4, 3.6, 3.7	4.6.1
Protective coating	MIL-C-85049/95	MIL-C-85049/95
Marking	MIL-C-85049/95	4.6.1
Installation	MIL-C-85049/95	MIL-C-85049/95
Vibration	3.5.4	MIL-C-85049/95
Shock	3.5.5	4.6.6

MIL-C-85049/95

Table II. Qualification - Continued.

Inspection	Requirement paragraph	Test paragraph
Coupling thread strength	3.5.9	4.6.10
Salt spray	MIL-C-85049/95	MIL-C-85049/95
External bending moment	MIL-C-85049/95	4.6.11
Locking torque	MIL-C-85049/95	MIL-C-85049/95
Torque out	MIL-C-85049/95	MIL-C-85049/95
Push out	MIL-C-85049/95	MIL-C-85049/95

Requirements:

Material. Mounting flanges shall be of a construction with predrilled or punched holes in aluminum alloy 2024-T3 per QQ-A-250/4 or 6061-T6 per QQ-A-250/11; and incorporating self locking nuts, clinch type, per MIL-N-45938/7 (see protective coating paragraph).


Protective coating: Alodine per MIL-C-5541, Class IA. When required, epoxy polyamide primer, 2 coats per MIL-P-23377, Type 1, shall be applied either before or after nut installation provided the performance characteristics of the nut are not degraded and all other requirements of the specification sheet are met. Clinch nuts shall be cleaned and descaled in accordance with ASTM A380 and passivated in accordance with QQ-P-35, followed by a solid film lubricant coating per MIL-L-46010.

Dimensions. Dimensions and tolerances shall be as stated herein and shall apply after plating and prior to supplemental lubrication.

Marking. Mounting flanges shall have the military part number and manufacturer's identification legibly and permanently marked as specified in MIL-C-85049 (see example of military part number).

Military part number:

Example: M85049/95-8A-A

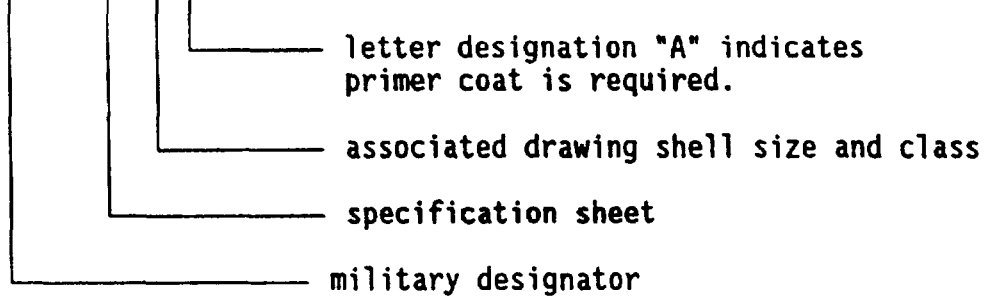

Installation. When tested as specified herein, evidence of cocking, looseness, splits or cracks shall be cause for rejection.

Salt spray. When tested as specified herein, there shall be no damage detrimental to the operation or function of the mounting flange.

External bending moment. When tested as specified herein, the sample shall not have any damage detrimental to the normal operation of the mounting flange.

Locking Torque. When tested as specified herein, samples shall meet the locking torque requirements specified in MIL-N-25027.

Torque out. The clinch nuts shall meet the torque out requirement of 15 in-lbs minimum for 4-40 threaded nuts and 20 in-lbs minimum for 6-32 threaded nuts when tested as specified herein.

Push out. The clinch nuts shall meet the push out requirement of 100 lbs minimum for 4-40 threaded nuts and 110 lbs minimum for 6-32 threaded nuts, when tested as specified herein.

Qualification: See table II.

Tests:

Test panels. With the connector and mounting flange installed as shown in figure 2, the test panel shall show no evidence of bending or cracking or other damage when subjected to the external bending moment test of this specification.

Protective coating. Examination and test of protective coating shall be in accordance with the applicable specification sheet. The protective coating shall be examined to insure compliance with the applicable finish requirements.

Installation. The mounting flange shall be installed as shown in figure 2. Installation forces shall be exerted so that the mounting flange will interface with the panel-flange type electrical connector. Properly installed

MIL-C-85049/95

samples shall be visually inspected under 10 diameters magnification. When applicable, the depth of embedment shall be measured using standard inspection equipment.

Vibration. Mounting flanges shall be subjected to the random vibration tests of MIL-STD-1344, method 2005, test condition VI, letter J, except the sample and fixture shall be as shown in figure 2 herein.

Salt spray. Samples taken as specified in MIL-C-85049 shall be subjected to the salt spray environment (Test condition C, 500 hours duration) specified in method 1001 of MIL-STD-1344.

External bending moment. The sample shall be tested in accordance with MIL-C-85049, using the test configuration of figure 2 in lieu of figure 1 of MIL-C-85049.

Locking torque. Mounting flanges shall be subjected to the locking torque tests specified in MIL-N-25027.

Torque out. Mounting flanges shall be subjected to the torque out tests specified in MIL-N-45938.

Push out. Mounting flanges shall be subjected to the push out tests specified in MIL-N-45938.

Preparation for delivery:

Preservation and packaging. Preservation and packaging shall be level A or C in accordance with PPP-H-1581.

Packing. Packing shall be level A, B or C, as specified in PPP-H-1581.

Marking. Marking of unit packages and shipping containers shall be in accordance with PPP-H-1581.

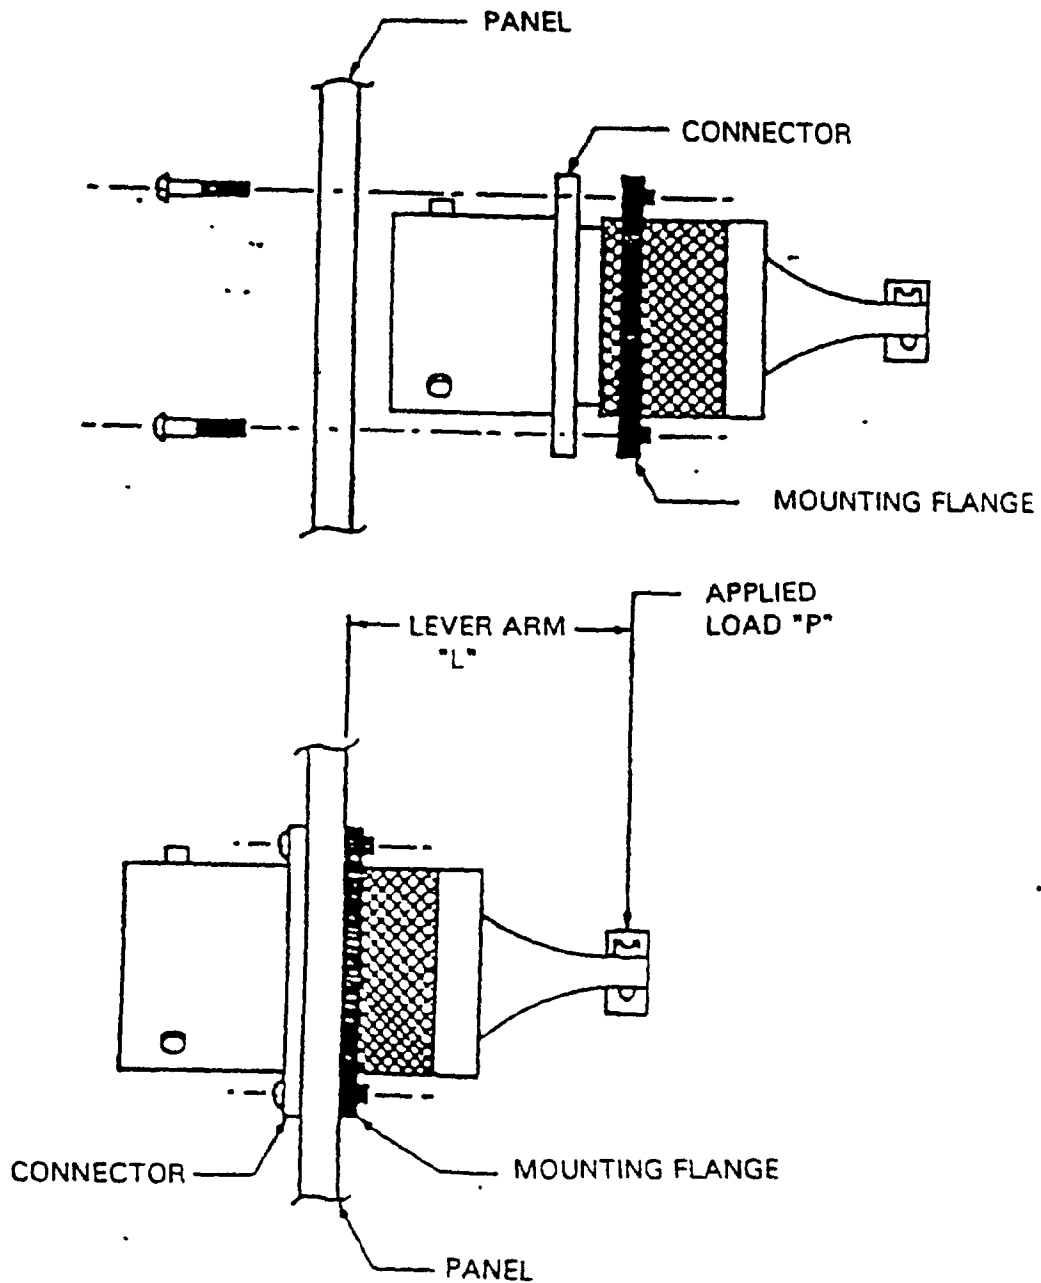


Figure 2. Installation - external bending moment test set-up.

MIL-C-85049/95

Table III. Mounting flange cross reference type II.

PROCUREMENT SPECIFICATION	MS SHEET	SHELL SIZES	PART NUMBER	ASSOCIATED DRAWING
MIL-C-5015	3100	8S 10 10SL 12S 12 14S 14 16S 16 18 20 22 24 28 32 36	M85049/ 95-X-A	8 10 -- 12 12 14 14 16 16 18 20 22 24
" "	3102	8S 10S 10SL 12S 12 14S 14 16S 16 18 20 22 24 28 32 36	"	8 10 -- 12 12 14 14 16 16 18 20 22 24
" "	3400	8S 10 10SL 12S 12 14S 14 16S 16 18 20 22 24 28 32 36	"	8 10 -- 12 12 14 14 16 16 18 20 22 24
" "	3402	8S 10 10SL 12S 12 14S 14 16S 16 18 20 22 24 28 32 36	"	8 10 -- 12 12 14 14 16 16 18 20 22 24
" "	3450	8S 10 10SL 12S 12 14S 14 16S 16 18 20 22 24 28 32 36	"	8 10 -- 12 12 14 14 16 16 18 20 22 24
" "	3452	8S 10 10SL 12S 12 14S 14 16S 16 18 20 22 24 28 32 36	"	8 10 -- 12 12 14 14 16 16 18 20 22 24
MIL-C-22992	17343	12 14 16 18 20 22	"	14 16 18 20 22 24
MIL-C-26482	3110	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	3112	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	3120	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	3122	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	3470	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	3472	8 10 12 14 16 18 20 22 24	"	-- 12 -- -- 22 24 25
MIL-C-27599	20026	9 11 13 15 17 19 21 23 --	"	10 12 14 16 18 20 22 24 25
	27334	9 11 13 15 17 19 21 23 25	"	10 12 14 16 18 20 22 24 25

MIL-C-85049/95

Table III. Mounting flange cross reference type II. - Continued.

PROCUREMENT SPECIFICATION	MS SHEET	SHELL SIZES	PART NUMBER	ASSOCIATED DRAWING
MIL-C-27599	27335	8 10 12 14 16 18 20 22 24	M85049/ 95-X-A	8 10 12 14 16 18 20 22 24
MIL-C-38999	27466	9 11 13 15 17 19 21 23 25	"	10 12 14 16 18 20 22 24 25
" "	27469	9 11 13 15 17 19 21 23 25	"	10 12 14 16 18 20 22 24 --
" "	27472	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	27475	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	27476	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	27496	9 11 13 15 17 19 21 23 25	"	10 12 14 16 18 20 22 24 25
" "	27497	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	27499	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	27505	9 11 13 15 17 19 21 23 25	"	10 12 14 16 18 20 22 24 25
" "	27508	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	27513	8 10 12 14 16 18 20 22 24	"	8 10 12 14 16 18 20 22 24
" "	27515	9 11 13 15 17 19 21 23 25	"	10 12 14 16 18 20 22 23 25
" "	/20	9 11 13 15 17 19 21 23 25	"	10 12 14 16 18 20 22 24 25
" "	/40	11 13 15 17 19 21 23 25	"	12 14 16 18 20 24 25

MIL-C-85049/95

Table III. Mounting flange cross reference type II. - Continued.

PROCUREMENT SPECIFICATION	MS SHEET	SHELL SIZES	PART NUMBER	ASSOCIATED DRAWING
MIL-C-38999	/42	11 13 15 17 19 21 23 25	M85049/ 95-X-A	12 14 16 18 20 22 24 25
MIL-C-81703	3130	3 7 12 19 27 37	"	-- 10 12 14 16 --

Custodians:

Army - CR  
Navy - AS  
Air Force - 85

Preparing Activity:

Navy - AS

(Project 5935-3845-02)

Review Activities:

Army - AR, MI  
Navy - EC, SH  
Air Force - 11, 99  
DLA - ES